




3 STAGE UNDERSINK WATER FILTER SYSTEM

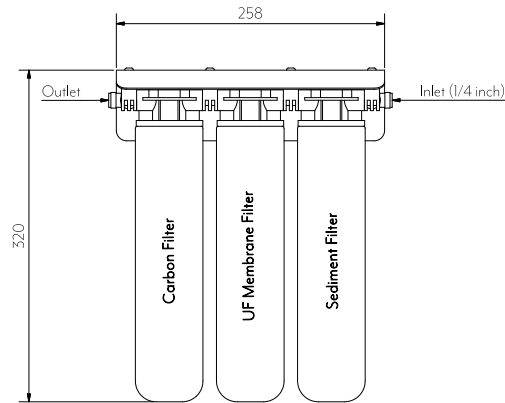

Front View

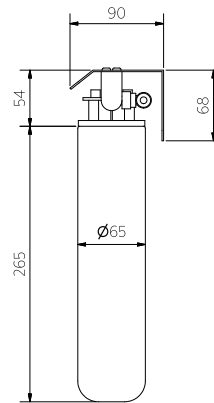

Side View

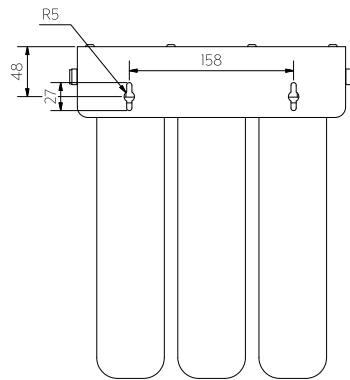

Back View



Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE

Domestic

TEMPERATURE RATING

Maximum continuous working temperature 52°C If the water temperature exceeds 52°C, an approved tempering valve must be fitted

PRESSURE RATING

Recommended minimum working pressure 200kPa
Recommended maximum working pressure 500kPa

FILTERS


Sediment Filter: Reduces sediment particles such as sand, silt, dirt and rust
UF Membrane Filter: Removes water contaminants such as waterborne microorganisms, harmful organic chemicals, and more
Carbon Filter: Removes chlorine, absorbs harmful organic chemicals, and improves the taste

INSTALLATION GUIDE


This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. AU/NZ: For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. UK: For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. Other: For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




- 1 Fit the filter unit in an accessible location under your bench top near your filter tap.

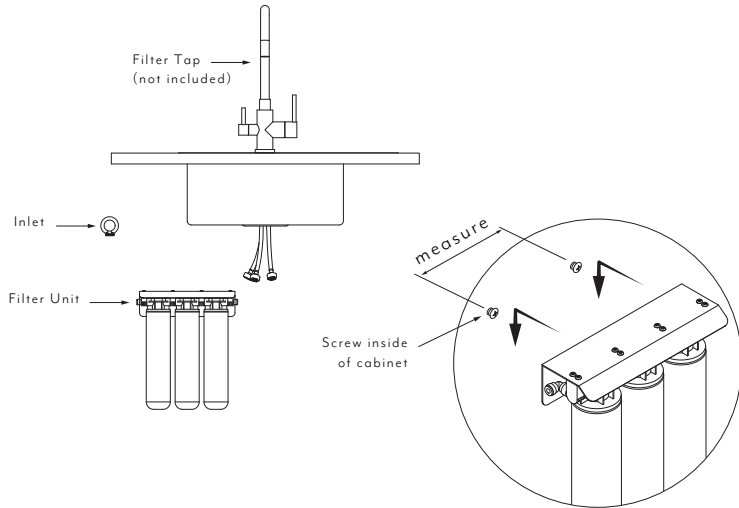

- 2 Connect the *Filter isolation tee* to the water inlet, Ensure a clean edge on the fridge hose before pushing on.

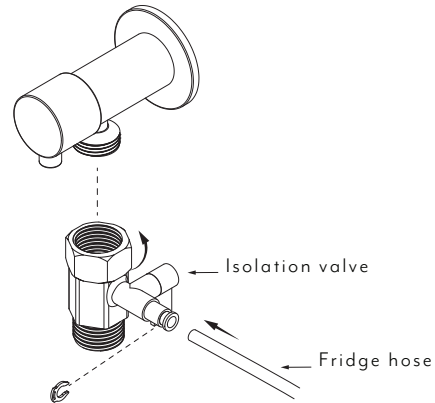


- 3
 1. Connect the pipework as below.
 2. Push all locking clips on
 3. Test and commission, ensure no leaks.

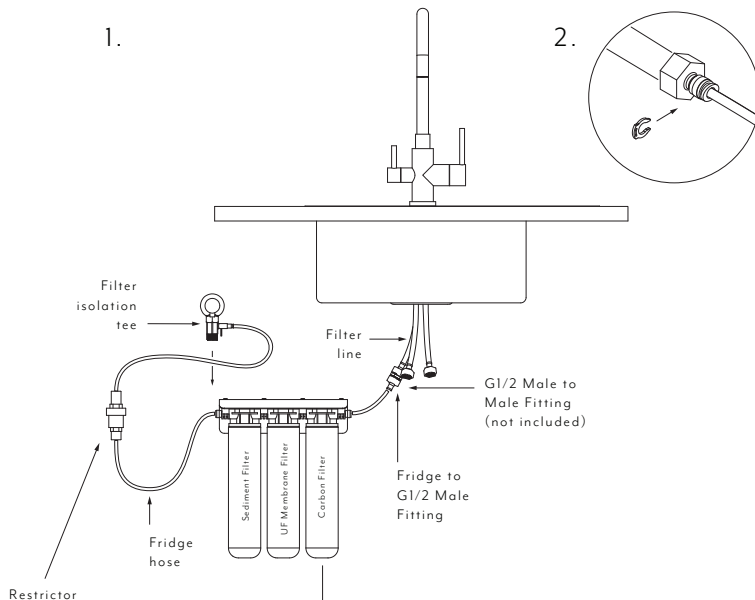

Note: A restrictor fitting may be necessary to protect your filter unit.

Note: You can re-order filter cartridges to copy this layout

IN THE BOX



1x 3 Stage Filter Unit




1x Filter isolation tee



1x Pressure limiting valve (Outlet: 500kpa)



1x G1/2 to Fridge hose connection



1x Fridge hose (1/4inch x 3m length)



5x Fridge locking clips



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material