


## CROSS ASSEMBLY HANDLE KIT

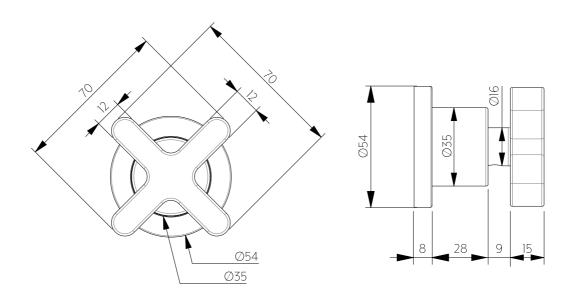

Note: Spindle & spindle body (in wall) not included in handle kit

Note: Dimensions are nominal measurements only

| SPECIFICATIONS  |             |
|-----------------|-------------|
| RECOMMENDED USE | Domestic    |
| MATERIAL        | Solid Brass |

## **INSTALLATION GUIDE**


**Note:** This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




NOTE: See Progressive Mixer Body installation guide for In-Wall set out.

- Choose sleeve based on how far your In-wall protrudes from finish wall and slide on.
- A Long Sleeve

  Short Sleeve
- Slide back plate on. Screw dome on.
- Tighten grub screw with allen key. Replace grub screw cap.

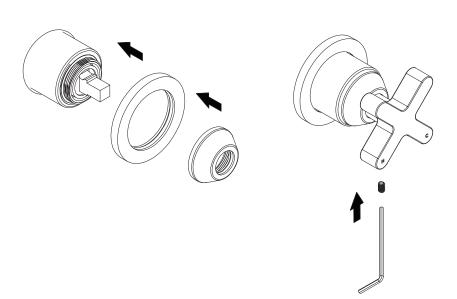


## MIXER OPERATION



## WHAT'S IN THE BOX

- 1. Back plate
- 2. Long sleeve
- 3. Dome
- 4. Handle
- 5. Grub screw
- 6. Short sleeve
- 7. Allen key

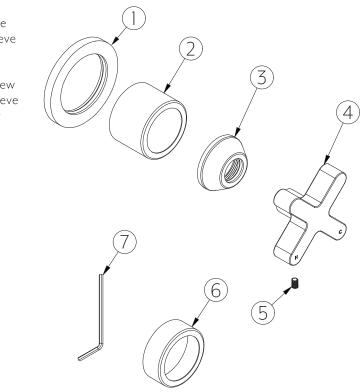



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material