


Top View

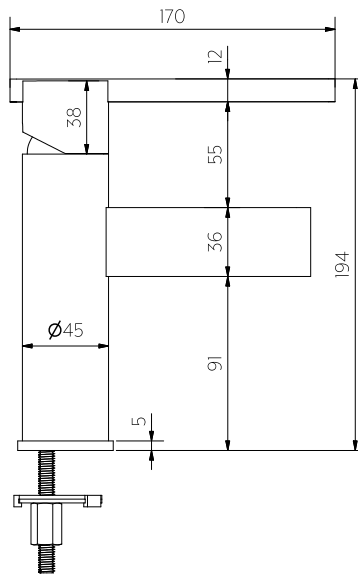

Side View

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE

Domestic/Commercial

MATERIAL

316 Stainless Steel

PRESSURE RATING

Maximum continuous operating pressure 1000kPa.W.
For best performance and longer life we recommend 150-500kPa.
Hot and cold water inlet pressure should be equal.

TEMPERATURE RATING

Maximum continuous working temperature 80°C

SUITABLE HOT WATER UNITS

Storage Tank: Yes
Continuous Flow: Yes
Gravity Feed: Not suitable

STANDARDS

WELS 5 Star, 6L/Min, T41251
AS1428.1:2021




INSTALLATION GUIDE


This product's install must comply with AS/NZS 3500, for installs outside Australia and New Zealand, the standards in your respective country must be adhered to by your licensed tradesperson. **This product's install must comply with AS1428.1 for installation within Australia.** This is a general installation guide - there are many factors that are involved that can alter the installation method.




- 1 Mark basin mixer location using provided measurements, ensuring location complies with **AS1428.1:2021** standards. Drill a 35mm hole using a multi purpose holesaw drill bit.

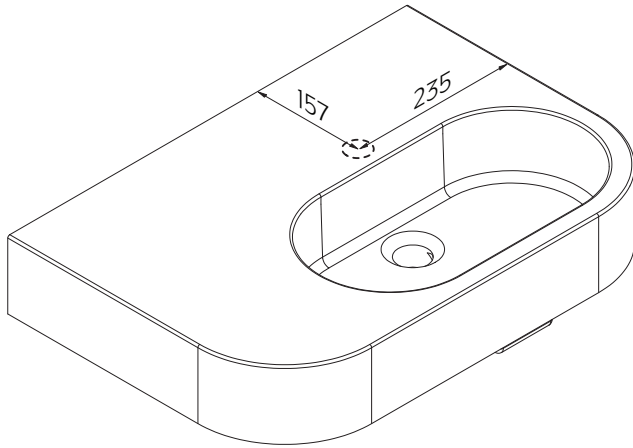


- 2 Apply appropriate lubricant to o ring and connect the hot and cold flexible hoses to the basin mixer.

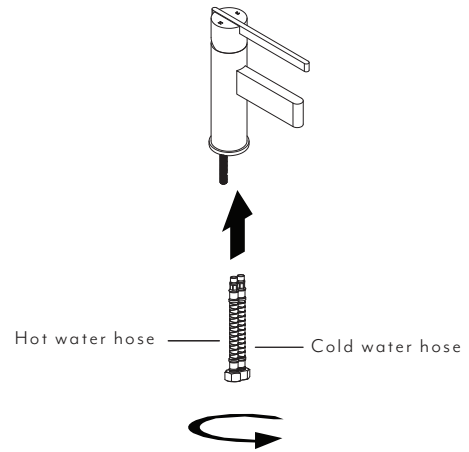


- 3 Install the basin mixer by fixing the basin between the mixer and the rubber seal, locking plate and nut.

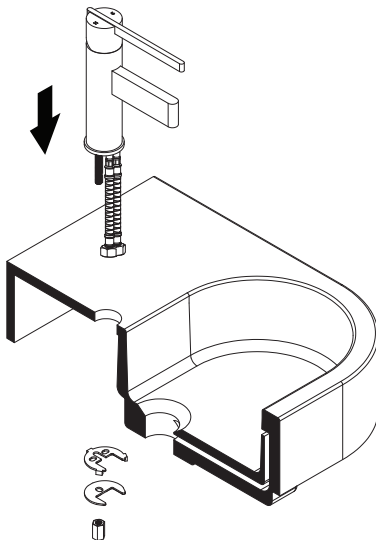

- 4 Attach the flexible hoses to the water supply and tighten. Remove the aerator from the spout and flush. Re- install aerator.

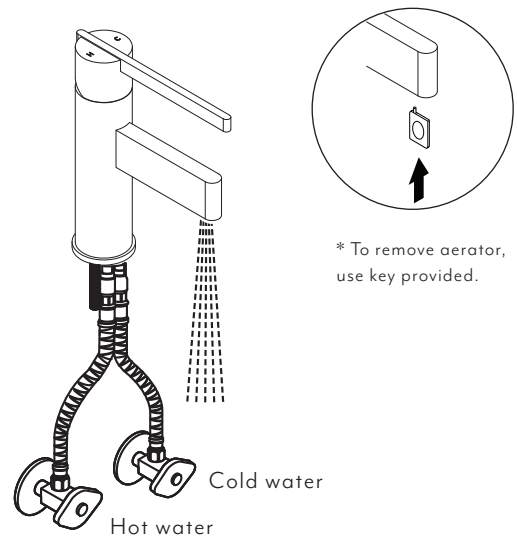

MIXER OPERATION

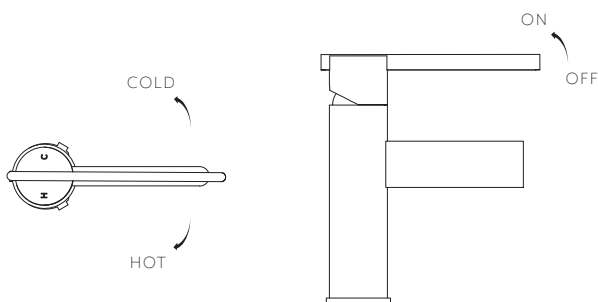

IN THE BOX		1 x Basin mixer		1 x Rubber seal
		1 x Aerator key		1 x Locking plate
		2 x Flexible hoses		2 x Nut
				2 x Threaded rod



Regularly clean with mild liquid detergent or soap and water.



DO NOT use cream cleaners or bleach. These substances are abrasive.



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material.