




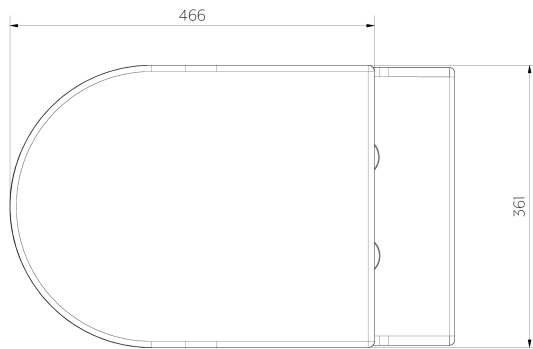

Top View

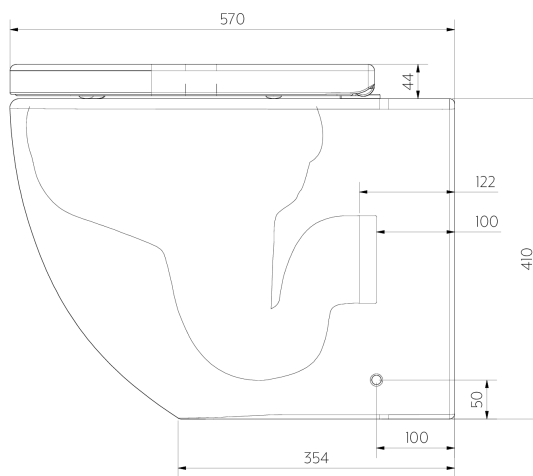

Side View

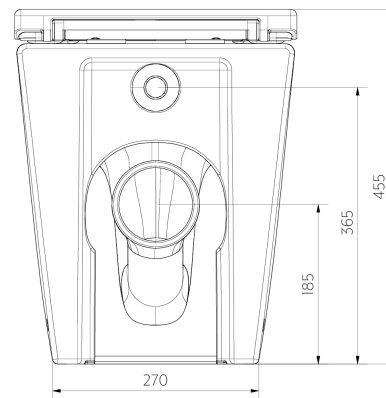

Rear View

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE

Domestic/Commercial

MATERIAL

Pan: Glazed porcelain

Seat: Soft close - Hardened Polypropylene (PP)

INSTALLATION

Floor Mounted

P-trap or S-trap (S-trap included)

PRESSURE RATING

Recommended minimum working pressure 150kPa

Recommended maximum working pressure 500kPa

Hot and cold water inlet pressure should be equal

TEMPERATURE RATING

Maximum continuous working temperature 75°C If the water temperature exceeds 75°C, an approved tempering valve must be fitted

STANDARDS

WELS 4 star, Full Flush 4.6L, Half Flush 3.0L, Average Flush 3.3L, L08448


INSTALLATION GUIDE

Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




- ① Align S trap adaptor with pipe riser and fix wall bracket accordingly. Ensure a **140mm** set out from wall to pipe centre.

Note: Use appropriate fixings according to wall finish.

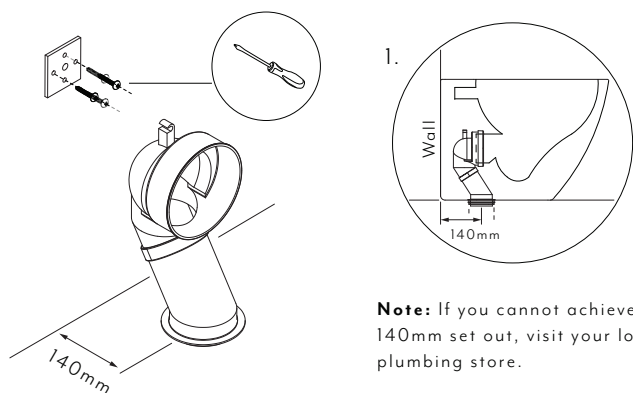


Note: If you cannot achieve a 140mm set out, visit your local plumbing store.


- ② Using a spanner, tighten nuts to fasten threaded rod to wall bracket and S trap adaptor.




- ③ Place pan collar onto S trap adaptor outlet.

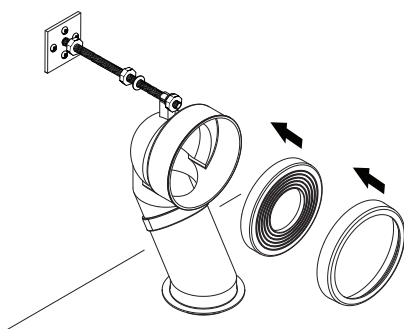


- ④ Cut flush pipe to suit.

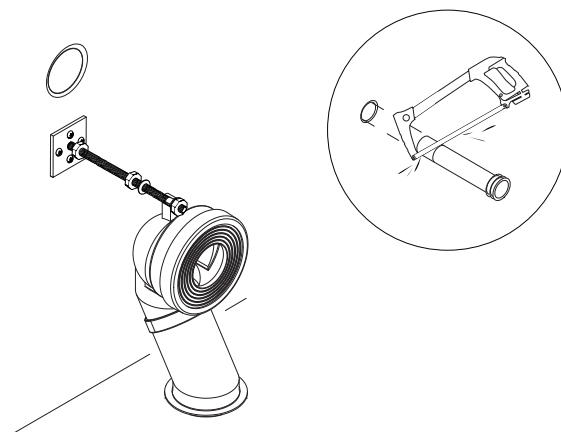

- ⑤ 1. File flush pipe and insert into o-ring seal socket in wall.
2. Push pan onto S trap adaptor and flush pipe.

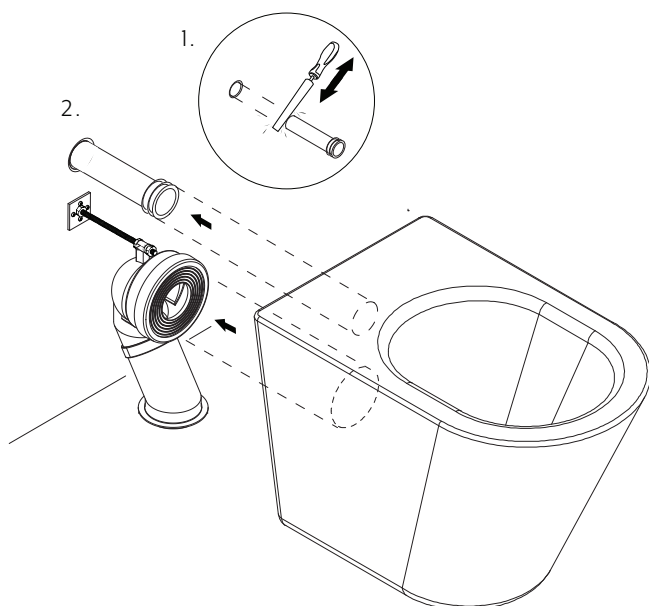

- ⑥ 1. Push expansion plugs into pan holes.
2. Use a screwdriver to attach hinges.
3. Adjust hinges and push seat on

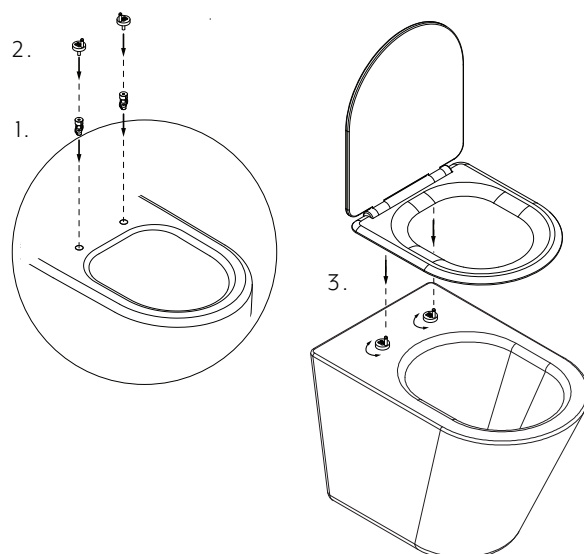


INSTALLATION GUIDE

Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.



IN THE BOX

BOX 1



1x pan2x screws



1x toilet seat2x hinges



2x toilet clips2x expansion plug

BOX 2



1x S trap adaptor2x washers



1x wall bracket3x nuts



1x threaded rod4x screws