

Front View

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE

Domestic

MATERIAL

Stainless Steel 304

INSTALLATION

Suits 40mm Trap

OVERFLOW

Compatible with overflow and non-overflow basins


INSTALLATION GUIDE

Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




WASTE INSTALLATION


① Fit foam washer and drop fixing bolt into base.

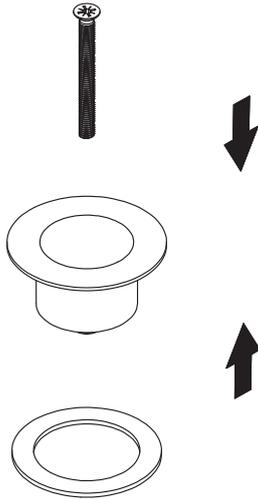


② 1. Place waste base through the basin.
2. Fix lower base and silicon washer to the underside of the benchtop/basin and tighten fixing bolt.

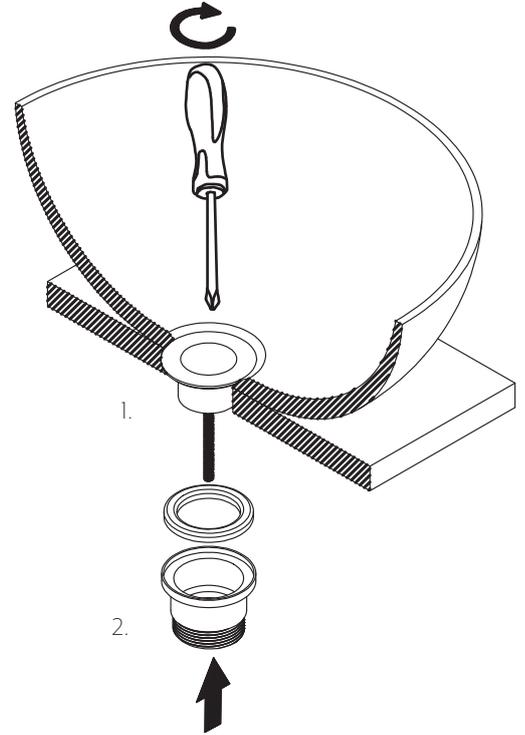

③ Connect pipe work and refit the lid and grate onto the waste.

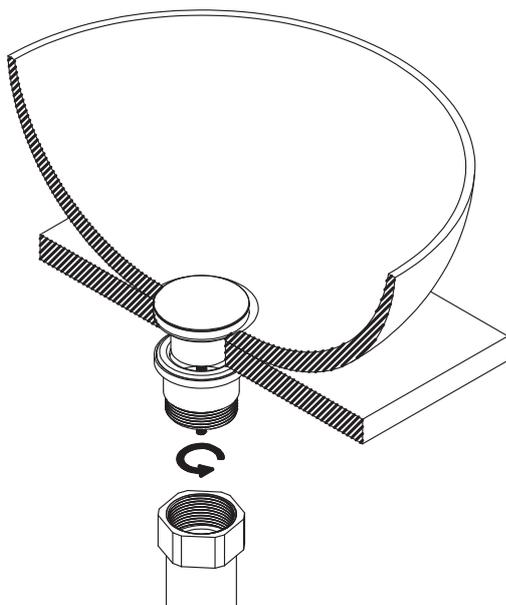


④ Test and commission for leaks.

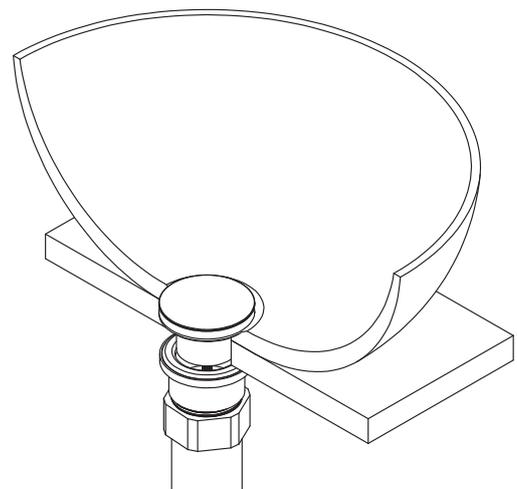

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material