


CYRUS WALL-HUNG BASIN 500MM X 300MM

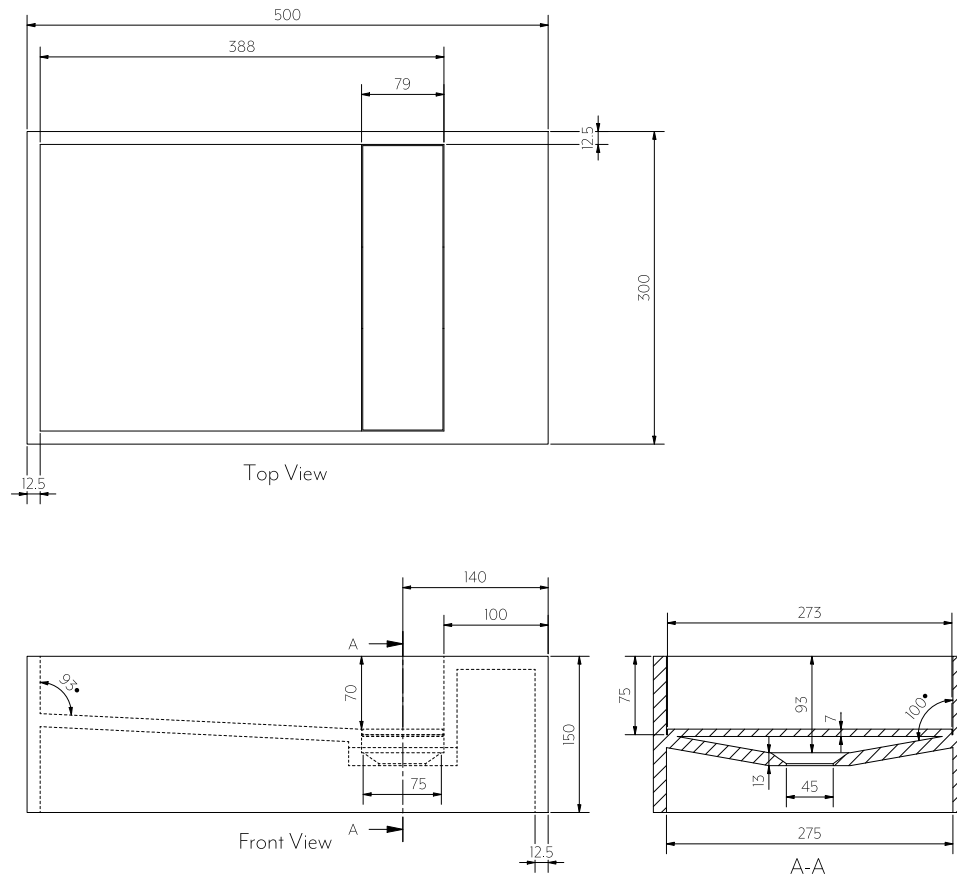

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE

Domestic

MATERIAL

Solid Surface

INSTALLATION

Wall Mount, Wall or Bench Mount Spout/Mixer
Hole for bench mount to be drilled on site.
Note: Water tap hoses are not able to be concealed under basin.

OVERFLOW

No

CAPACITY

5L

RIM THICKNESS

12.5mm


INSTALLATION GUIDE

This product must be installed by a licensed tradesperson.


This is a general installation guide - there are many factors that are involved that can alter the installation method. This product install must comply with the standards in your respective country and must be adhered to by your licensed tradesperson.




- ① Check the desired height of basin from floor.

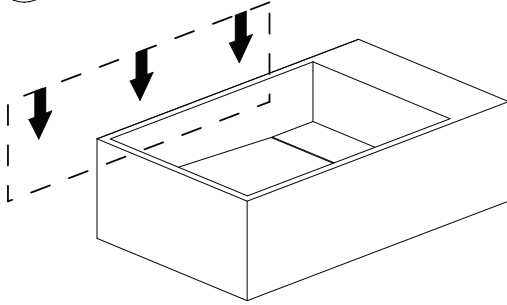


- ② Fit waste and trap to basin.

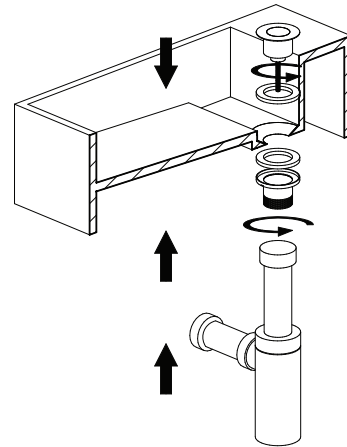


- ③ Hold basin against wall aligning outlet of trap with waste pipe. Extend telescopic trap up or down to find desired height & cut waste to suit trap.

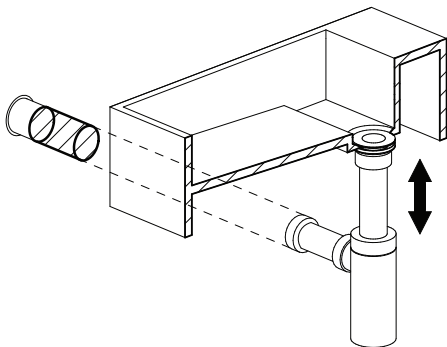

- ④ If correct height and position is suitable, level the top of the basin & mark out desired position. Drill 15mm holes through the back of basin with a wood drill bit at maximum 450mm centres. Fix basin into structural support in wall.

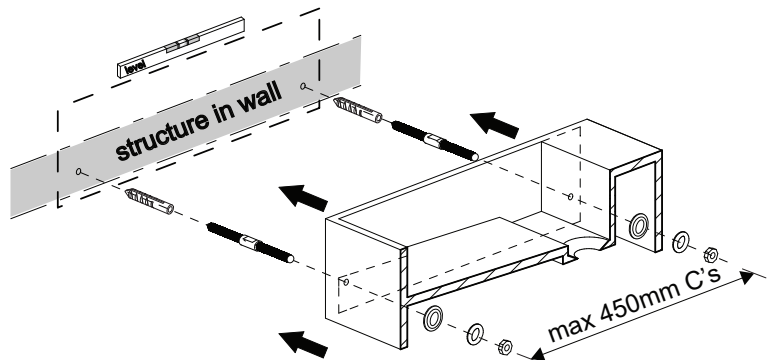

- ⑤ Secure plumbing to basin and wall outlet. Test by running water through the waste. Place the cover plate over drain. Silicone top and sides of basin if necessary.

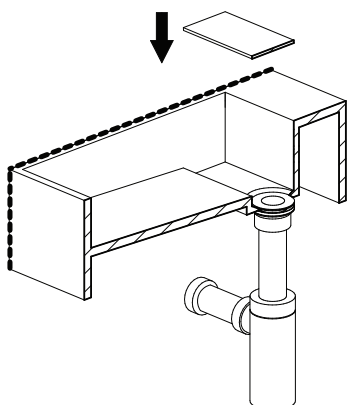


Regularly clean with mild liquid detergent or soap and water.



DO NOT use cream cleaners or bleach. These substances are abrasive.



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material.

IN THE BOX		2 x Wall plug		2 x Metal washer
		2 x M8 Hanger bolt		2 x Nut
		2 x Plastic washer		1 x Basin