


Side View



Bottom View

Note: Dimensions are nominal measurements only

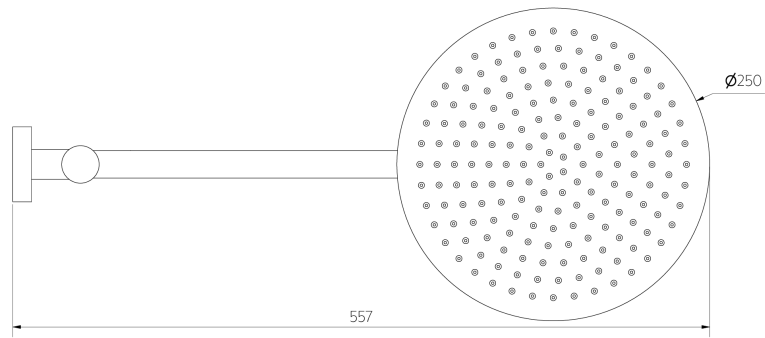

SPECIFICATIONS

RECOMMENDED USE | WARRANTY


Domestic/Commercial | [Click here for warranty periods](#)

BOX

Box 1: Eden Shower Arm
Box 2: Shower Head Round 250mm

STANDARDS

WELS 4 star, 7.5L/min

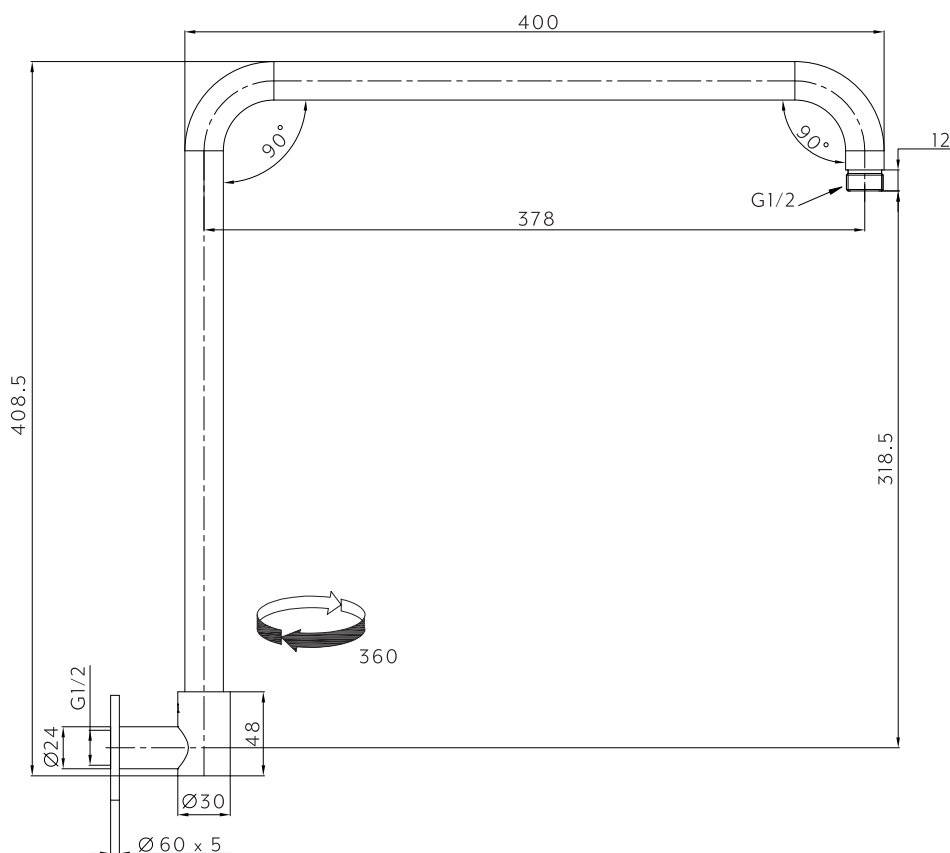

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE

Domestic

MATERIAL

Solid Brass

TEMPERATURE RATING

Maximum continuous working temperature 75°C
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

PRESSURE RATING

Recommended minimum working pressure 150kPa
Recommended maximum working pressure 500kPa
Hot and cold water inlet pressure should be equal

SUITABLE HOT WATER UNITS

Storage tank: Yes
Continuous Flow: Yes
Gravity Feed: Not suitable

Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors that are involved that can alter the installation method. This product install must comply with AS/NZS 3500.



- 1) Check that the male brass thread installed in the wall is the correct length. Cut to length if required ensuring end face is square. Apply thread tape to the thread.
- 2) Slide the cover plate onto the arm. Carefully screw the arm onto the brass thread until the threaded end is adjacent to the wall/tile or ceiling face and the outlet is facing down. Do not tighten and be careful not to damage the decorative finish. Push the cover plate until it meets the wall/ceiling face.
- 3) Refer to individual product guide for installation of shower head.

[illegible]


Regularly clean with mild liquid detergent or soap and water.




DO NOT use cream
cleaners or bleach.
These substances are
abrasive.



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material.

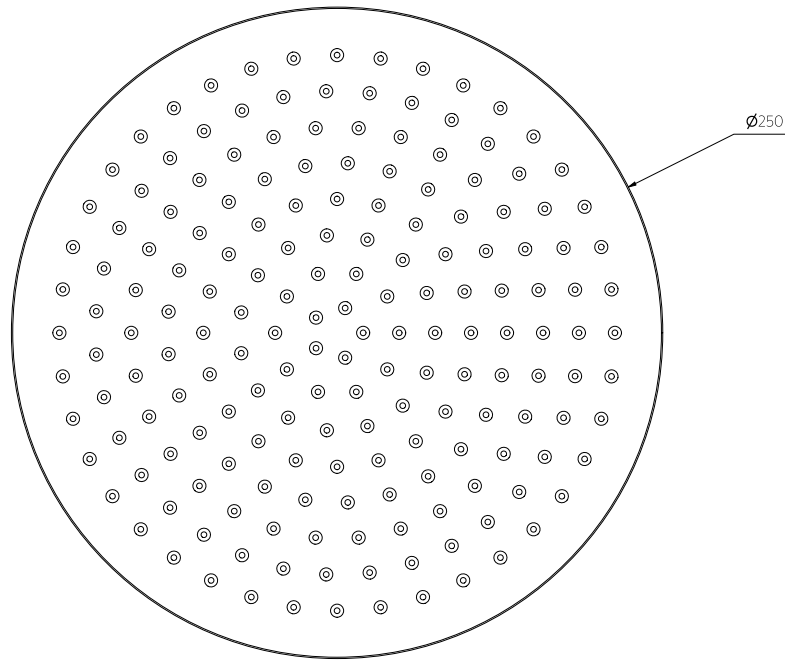

Bottom View

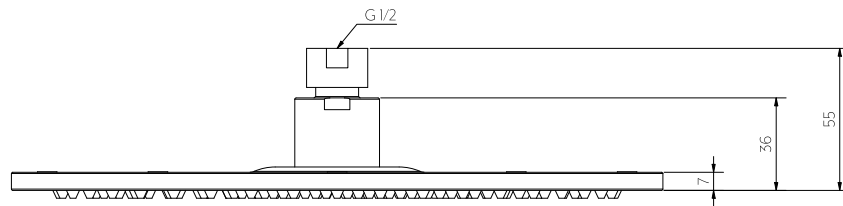

Front View

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE

Domestic

MATERIAL

Solid Brass

TEMPERATURE RATING

Maximum continuous working temperature 75°C
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

PRESSURE RATING

Recommended minimum working pressure 150kPa
Recommended maximum working pressure 500kPa
Hot and cold water inlet pressure should be equal

SUITABLE HOT WATER UNITS

Storage tank: Yes
Continuous Flow: Yes
Gravity Feed: Not suitable

STANDARDS

WELS 3 Star, 8.5L/min, S16493

INSTALLATION GUIDE

Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.





1 Ensure o-ring is fitted inside the ball joint connector.

2 Fasten ball joint and shower head to arm with spanner using a cloth to ensure not to damage finish.

*Shower arm and back plate not included.

Note: Please take care not to damage the flow controller whilst connecting.

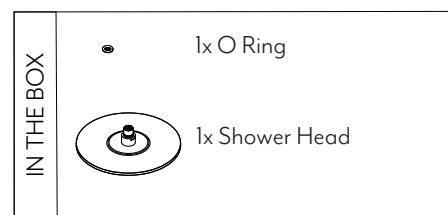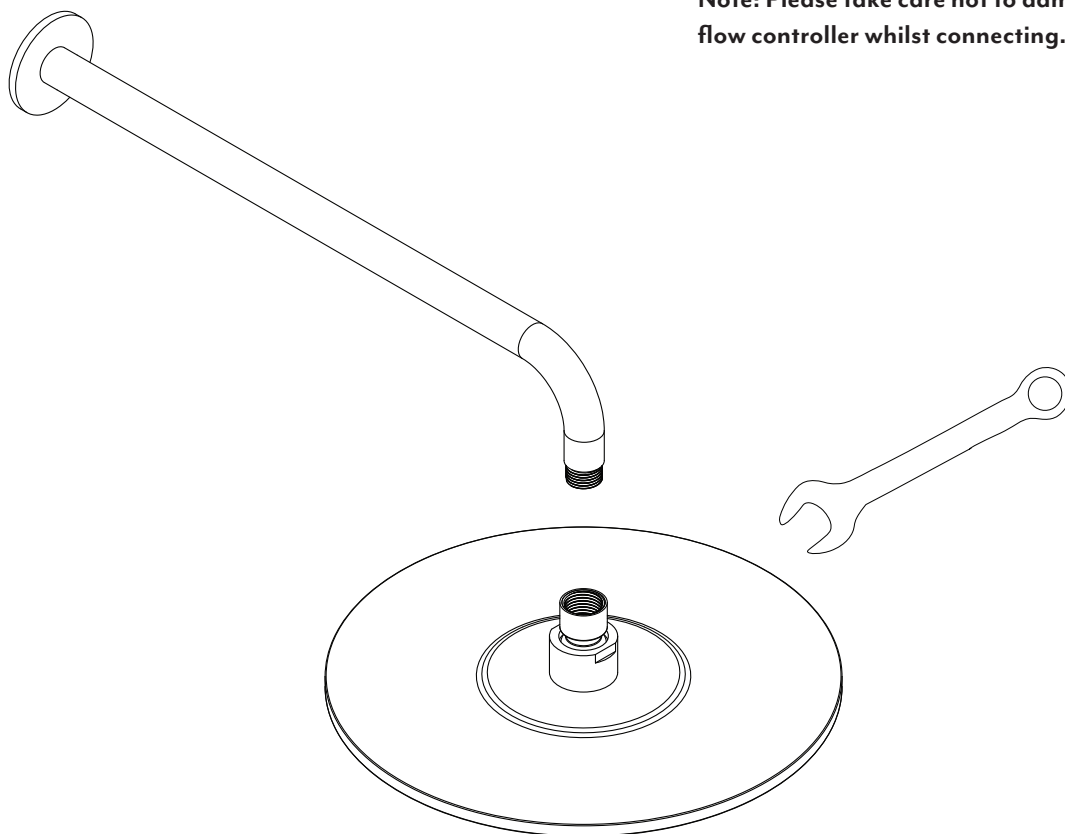

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive.



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material.