

SPECIFICATIONS

RECOMMENDED USE

Domestic

MATERIAL

Solid Brass

TEMPERATURE RATING

Maximum continuous working temperature 75°C
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

PRESSURE RATING

Recommended minimum working pressure 150kPa
Recommended maximum working pressure 500kPa
Hot and cold water inlet pressure should be equal

SUITABLE HOT WATER UNITS

Storage tank: Yes
Continuous Flow: Yes
Gravity Feed: Not suitable

STANDARDS

WELS Star Rating 5 Star - Flow Rate 5.5L/Min
Registration No. T36584, WM-022852 - AS/NZS 3718:2005


INSTALLATION GUIDE



Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.

1


Mark hole in benchtop at desired position and drill a 35mm hole.

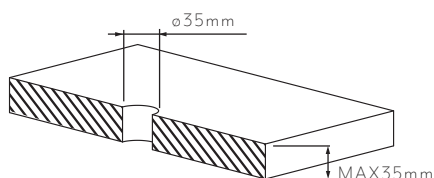

**** If installing into a thicker benchtop - a longer threaded rod is required to fix the Basin Mixer down.**


2

As shown in the figure, connect the H & C flexible hoses. ABI recommends applying appropriate lubricant to o-rings

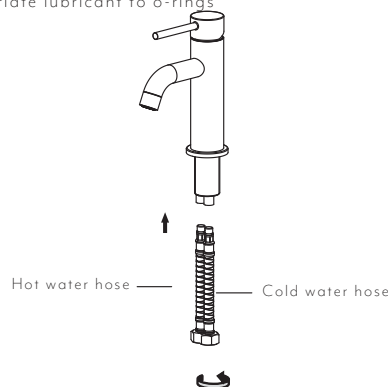


3

Install the basin mixer by fixing the washers, nut & screws on the underside of the benchtop.


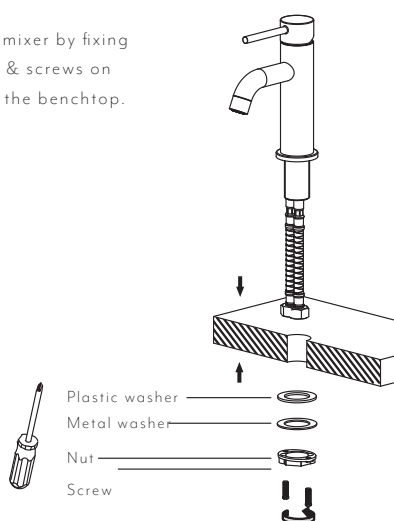


4

Attach the two flexible hoses to water supply and hand tighten. Remove the aerator from the spout and flush. Re-install aerator

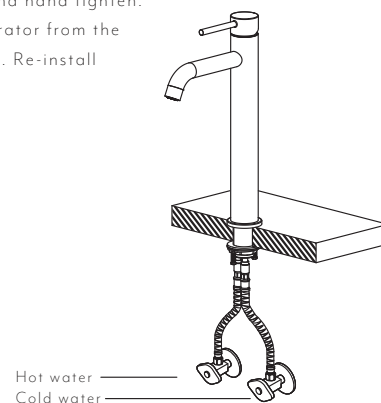

MIXER OPERATION



Regularly clean with mild liquid detergent or soap and water.



DO NOT use cream cleaners or bleach. These substances are abrasive.



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material.