

Note: Dimensions are nominal measurements only

Disclaimer * This product is designed to be used with wall mounted tapware

SPECIFICATIONS

RECOMMENDED USE

Domestic

MATERIAL

Solid Brass

TEMPERATURE RATING

Maximum continuous working temperature 75°C
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

PRESSURE RATING

Recommended minimum working pressure 150kPa
Recommended maximum working pressure 500kPa
Hot and cold water inlet pressure should be equal

SUITABLE HOT WATER UNITS


Storage tank: Yes
Continuous Flow: Yes
Gravity Feed: Not suitable

STANDARDS

WELS 5 Star, 6L/min, T38391

INSTALLATION GUIDE

Note: This product must be installed by a licensed plumber.
This is a general installation guide - there are many factors that are involved that can alter the installation method. This product install must comply with AS/NZS 3500.

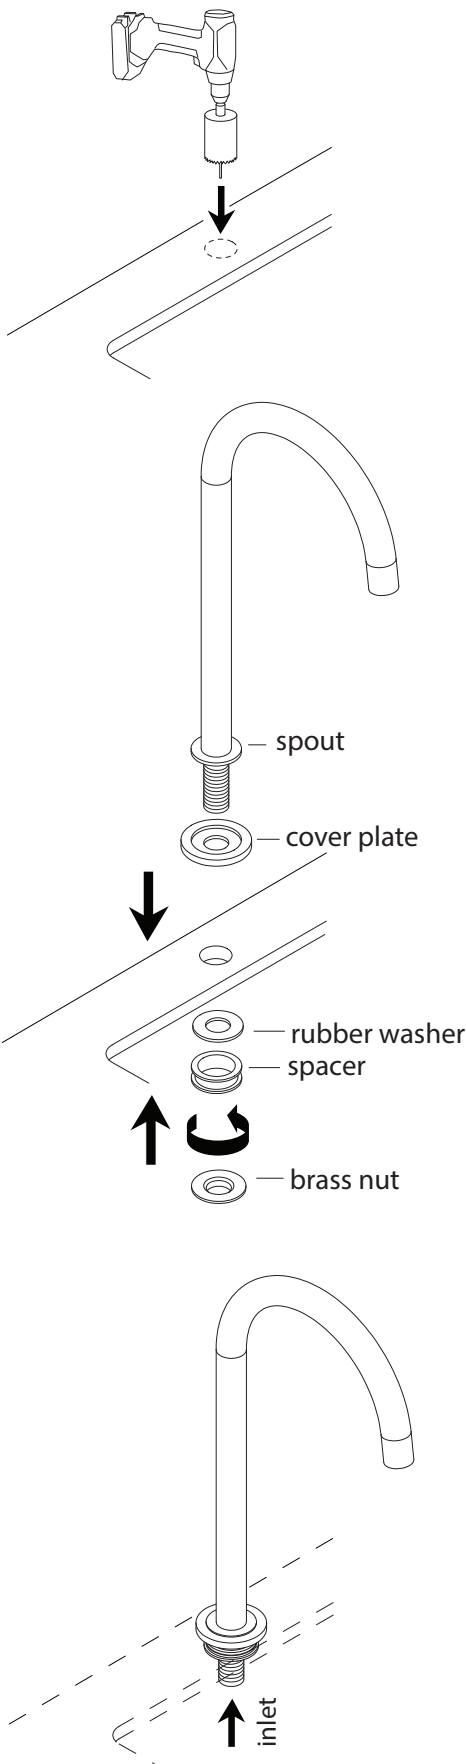

1

Mark out desired location of spout.

Cut hole using a **30 mm** hole saw.

Note: If cutting a stone benchtop it will need to be cut in a controlled environment by a licensed tradesperson as per OH&S regulations.

2

Fix spout to benchtop with brass nut ensuring cover plate is fitted above the bench and the rubber washer and spacer is fitted to underside of benchtop.

3

Connect pipework to inlet of spout.

IN THE BOX		1x spout		1x cover plate
				1x spacer (if required)
				1x rubber washer
				1x brass nut



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach
These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material