

Front View

**Note:** Dimensions are nominal measurements only

**SPECIFICATIONS**

RECOMMENDED USE

Domestic

MATERIAL

Solid Brass

TEMPERATURE RATING

Maximum continuous working temperature 75°C  
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

PRESSURE RATING

Recommended minimum working pressure 150kPa  
Recommended maximum working pressure 500kPa  
Hot and cold water inlet pressure should be equal

FUNCTION

1/4 Turn (clockwise & anti-clockwise spindle in set)

# INSTALLATION GUIDE

**Note:** This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.





- ① **New Build**  
Install breach in desired position

### Retrofitting Existing

Remove existing tapware & reseal body seats until shiny & smooth. Remove locking nut and screw spindle into breach, hand tighten until rear of spindle meets the body seat. **Be sure not to overtighten.** If necessary apply more pressure lightly with a spanner.

\*At this point it is recommended to test the orientation of your chosen handles. Micro adjustments can be made to spindle to ensure correct handle orientation before installing the locking nut.

- ② Place compression washer over spindle and screw on the locking nut, tightening with a spanner.  
**TEST AND COMMISSION.**  
**ENSURE THERE ARE NO LEAKS.**

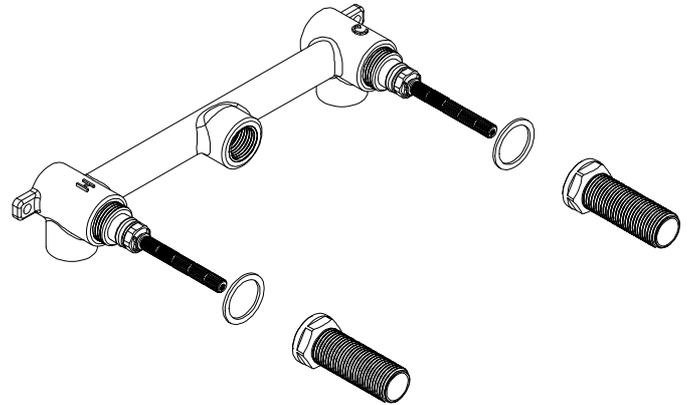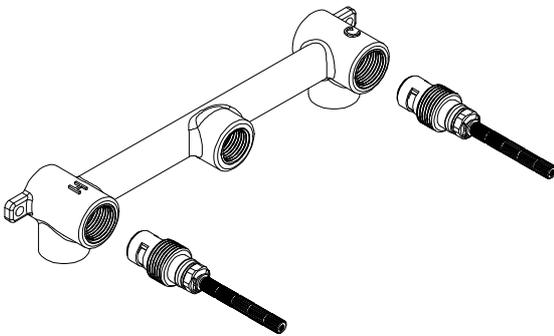

- ③ Nut and spindle are trimmable onsite to fit your chosen handle kit. Please see handle kit install guide for setback from finish wall guides.

## IN THE BOX



1 x Hot spindle - Red  
(turn clockwise on)



1 x Cold spindle - Blue  
(turn anticlockwise on)



2 x Compression  
washer




2 x Locking  
nut



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material