



TOP VIEW

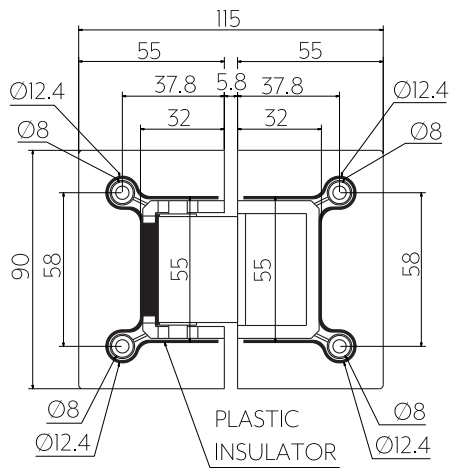

SIDE INTERNAL VIEW

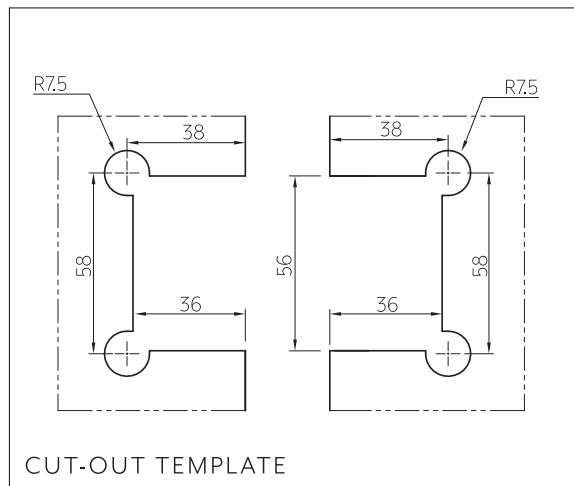

CUT-OUT TEMPLATE

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE

Domestic

MATERIAL

304 Stainless Steel

INSTALLATION

Glass to Glass

GLASS THICKNESS

10-12mm

WEIGHT CAPACITY

30kg per hinge
Max door width for 10mm glass is 700mm

FUNCTION


Dual Function - Swivel inwards and outwards

INSTALLATION GUIDE

Note: This product must be installed by a licensed tradesperson.
This is a general installation guide - there are many factors that are involved that can alter the installation method.
This product install must comply with the standards in your respective country and must be adhered to by your licensed tradesperson.




- ① Fit plastic sheild & packers to hinge.

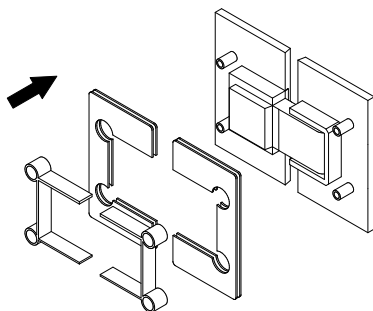


- ② Install glass. Allow clearance under door for shower door drip rail. Clearance height as per shower door drip rail supplier spec.
The glass door must also have a nominal clearance gap between it & the fixed glass panel.

Can be used on glass up to 12mm thick, an additional plastic packer has been provided for panels less than 12mm.

Attach hinge into glass cut out position.

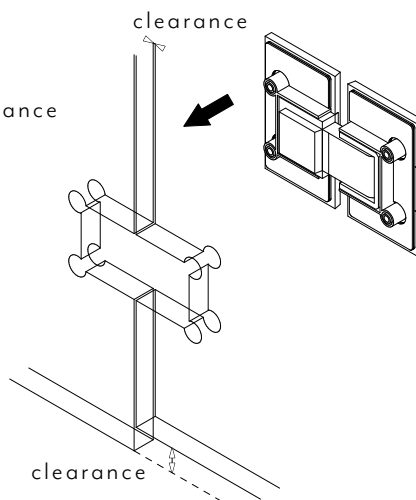

- ③ Fit hinge plate and packers with fixings provided.
Tighten up grub screws using an allen key.
This will clamp the glass to hold it in place.

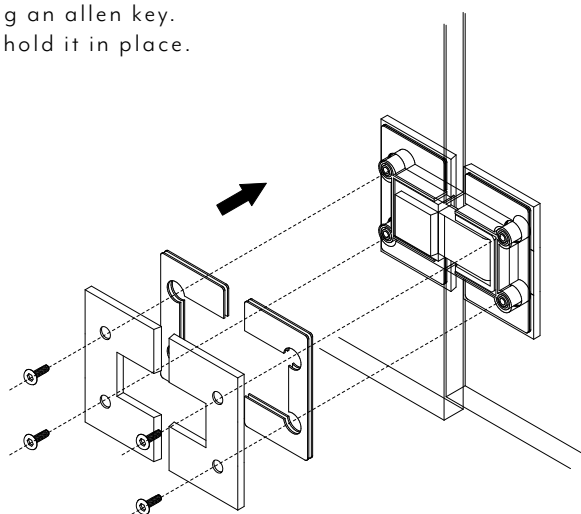

Regularly clean with mild liquid detergent or soap and water.



DO NOT use cream cleaners or bleach. These substances are abrasive.



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material.