

Side View

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE

Domestic

MATERIAL

Solid Brass

TEMPERATURE RATING

Maximum continuous working temperature 75°C
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

PRESSURE RATING

Recommended minimum working pressure 150kPa
Recommended maximum working pressure 500kPa
Hot and cold inlet pressure should be equal

SUITABLE HOT WATER UNITS

Storage tank: Yes
Continuous flow: Yes
Gravity fed: Not suitable

STANDARD


WELS 5 Star, 5.5L/min, T42753

INSTALLATION GUIDE


Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




- ① Mark hole in benchtop at desired position and drill a 35mm hole.

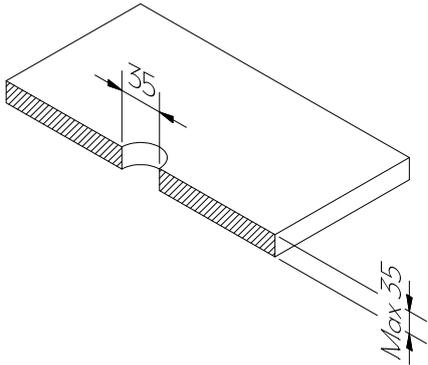



- ③ Apply the appropriate lubricant to o rings and connect the hot and cold flexible hoses to basin mixer.

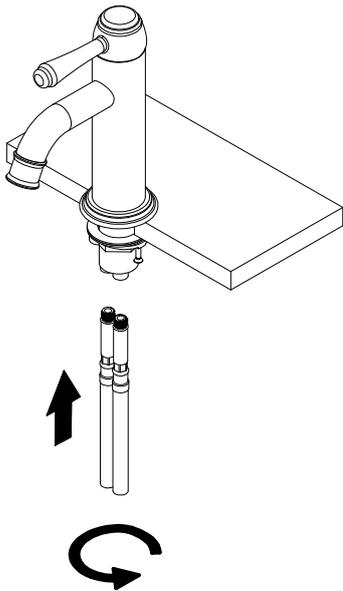

- ② Install the basin mixer by fixing the basin/benchtop between the mixer and the rubber seal, locking plate and nut.

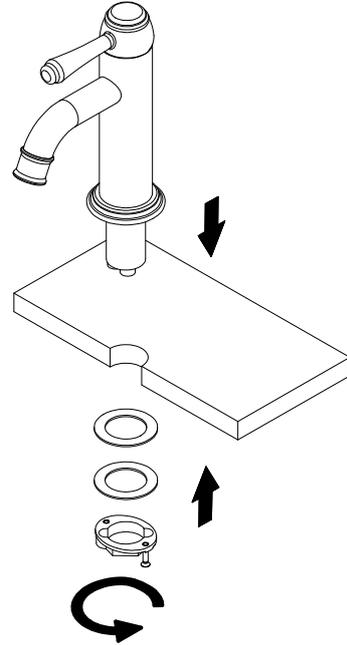


- ④ Attach the flexible hoses to the water supply and tighten. Remove the aerators from the spout and flush. Re-install aerator. Test and commission.

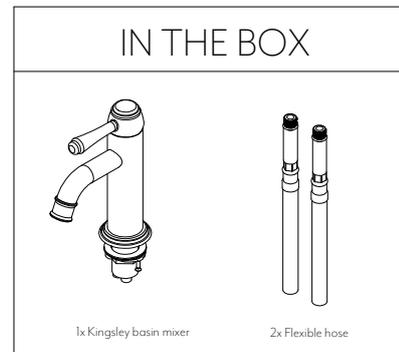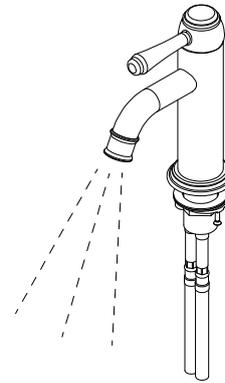

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material