


INSTALLATION GUIDE


Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




- ① Mark hole in benchtop at desired position and drill a 35mm hole.

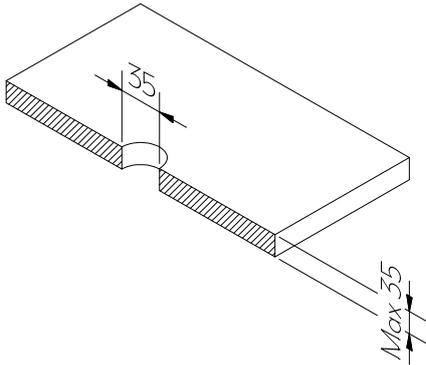



- ② Install the basin mixer by fixing the benchtop/basin between the mixer and the rubber seal, locking plate and nut.

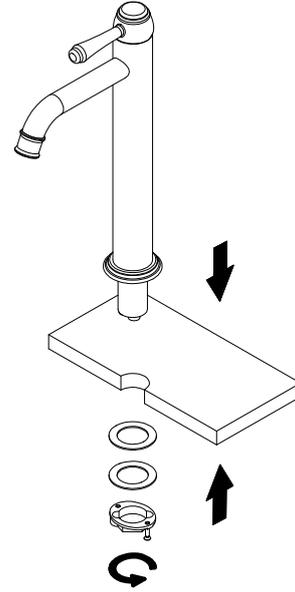

- ③ Apply the appropriate lubricant to o rings and connect the hot and cold flexible hoses to basin mixer.

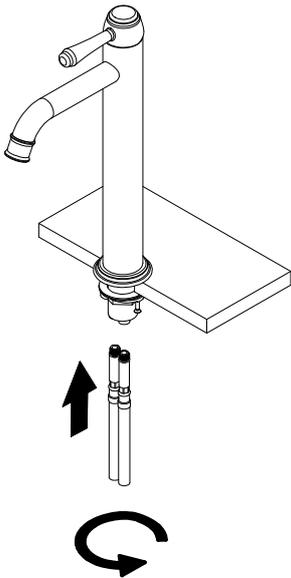


- ④ Attach the flexible hoses to the water supply and tighten. Remove the aerators from the spout and flush. Re-install aerator. Test and commission.

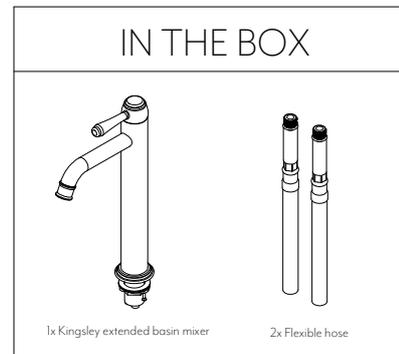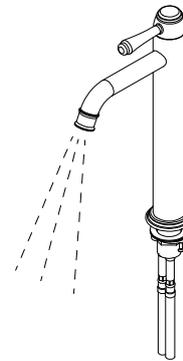

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material