

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE

Domestic

MATERIAL

Solid Brass

TEMPERATURE RATING

Maximum continuous working temperature 75°C
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

PRESSURE RATING

Recommended minimum working pressure 150kPa
Recommended maximum working pressure 500kPa
Hot and cold water inlet pressure should be equal

SUITABLE HOT WATER UNITS

Storage tank: Yes
Continuous Flow: Yes
Gravity Feed: Not suitable

STANDARDS

WELS 5 Star, 6L/min, T40086



INSTALLATION GUIDE



Note: This product must be installed by a licensed plumber.
This is a general installation guide - there are many factors that are involved that can alter the installation method. All work carried out must comply and be according to AS/NZS 3500.



- 1 Slide back plate onto spout. Ensure o ring is firmly gripping the spout and creating a tight seal.

- 2 Apply the teflon tape to the brass nipple. Twist the spout on and hand tighten. Push back plate to the wall surface.

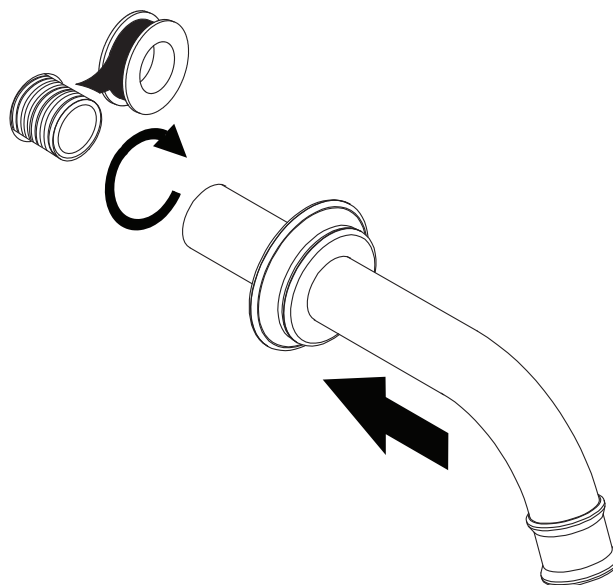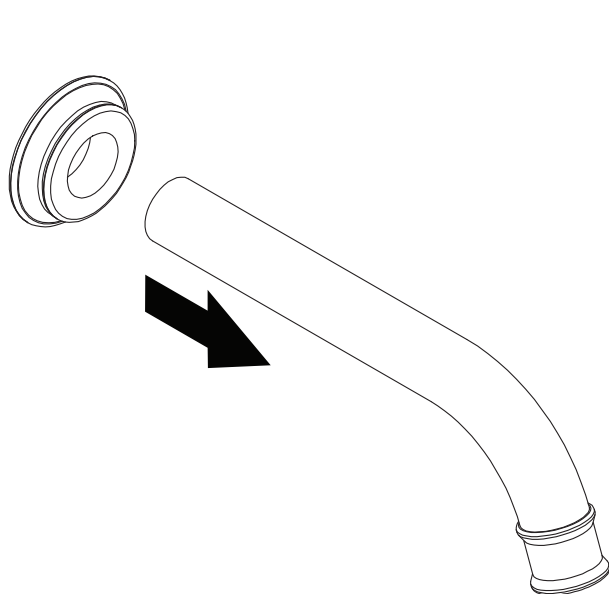

WHAT'S IN THE BOX	
	
1x Back plate	1x Spout



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach
These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material