

**Note: Dimensions are nominal measurements only**

## SPECIFICATIONS

### RECOMMENDED USE

Domestic, Commercial

### TEMPERATURE RATING

Maximum continuous working temperature 75°C  
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

### PRESSURE RATING

Recommended minimum working pressure 150kPa  
Recommended maximum working pressure 500kPa  
Hot and cold water inlet pressure should be equal

### SUITABLE HOT WATER UNITS

Storage tank: Yes  
Continuous Flow: Yes  
Gravity Feed: Not suitable

### STANDARDS

WELS 5 star, 6L/min, T41701

### BOXES IN SET

4 Boxes


# INSTALLATION GUIDE

This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. AU/NZ: For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. UK: For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. Other: For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




1. Mark out desired location of taps in relation to spout. Cut holes using a **35mm** hole saw.

**Note:** If cutting a stone bench top it will need to be cut in a controlled environment by a licensed tradesperson as per OH&S regulations.

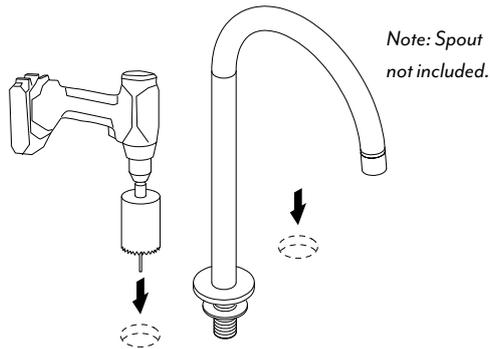


2. 1. Screw spindle into in-bench breech, followed by the brass nut and plastic washer.


2. Push spindles through holes and secure to the bench top, ensure the base plates are **45mm** down from spindle top.

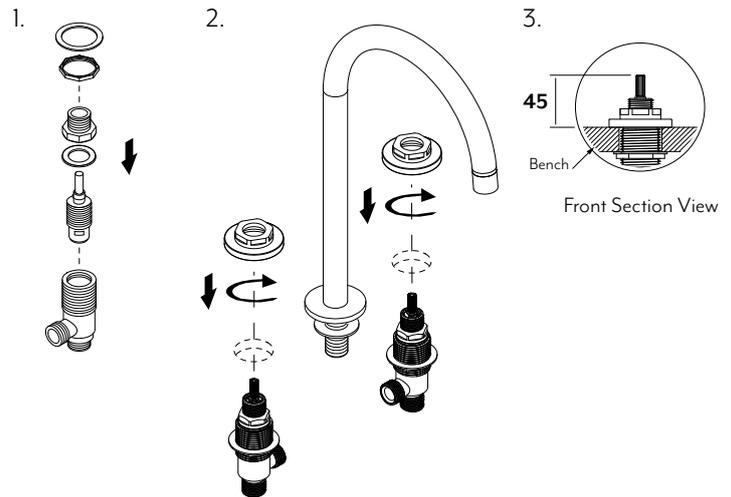

3. Fix handles by pushing them down and tightening the grub screws from the back. Screw compression tee fitting to spout.

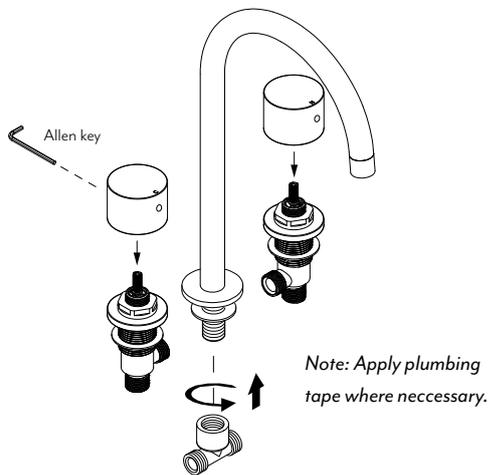

4. Connect pipework to spout from taps using flexi hoses. (**flexi hoses not included**)

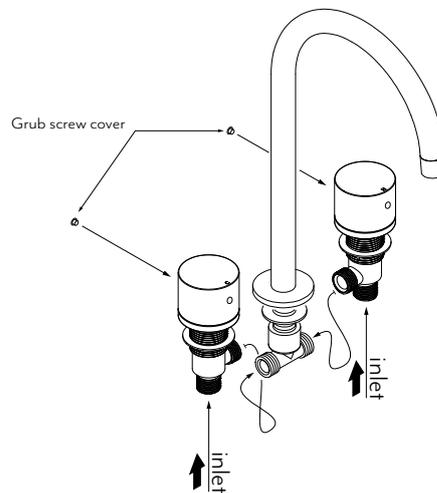


IN THE BOX - (In-bench)		IN THE BOX - (Handle kit)		IN THE BOX - (Spindle kit)	
2 x in-bench breech	1 x compression tee fitting	2 x handle		2 x spindle (1x R-hand turn, 1x L-hand turn)	
2 x washer	2 x small nut	2 x base plate		2 x o-ring	
2 x large nut	2 x olive	2 x grub screw cover		2 x locking nut	




Regularly clean with mild liquid detergent or soap and water.




DO NOT use cream cleaners or bleach. These substances are abrasive.



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material.

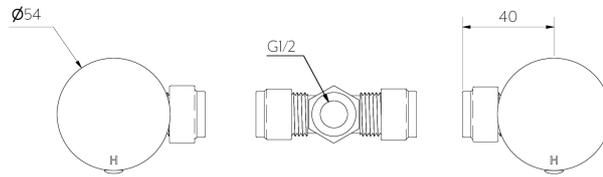

Top View

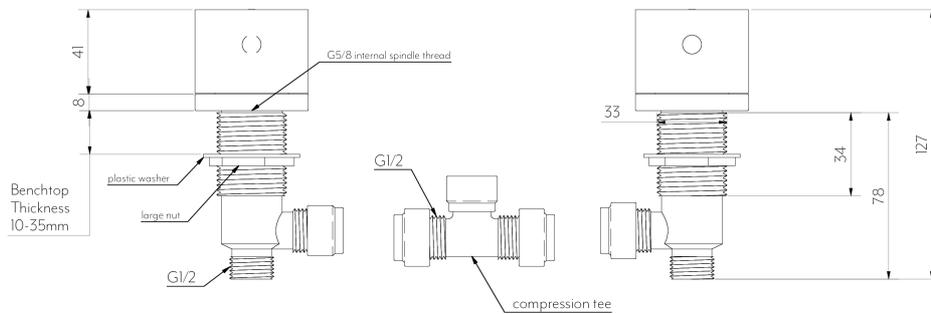

Front View

**Note: Dimensions are nominal measurements only**

## SPECIFICATIONS

### RECOMMENDED USE

Domestic, Commercial

### MATERIAL

Solid Brass

### TEMPERATURE RATING

Maximum continuous working temperature 75°C  
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

### PRESSURE RATING

Recommended minimum working pressure 150kPa  
Recommended maximum working pressure 500kPa  
Hot and cold water inlet pressure should be equal

### SUITABLE HOT WATER UNITS

Storage tank: Yes  
Continuous Flow: Yes  
Gravity Feed: Not suitable

### BOXES IN SET

3 Boxes


# INSTALLATION GUIDE

This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. AU/NZ: For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. UK: For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. Other: For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




- ① Mark out desired location of taps in relation to spout. Cut holes using a **35mm** hole saw.

**Note:** If cutting a stone bench top it will need to be cut in a controlled environment by a licensed tradesperson as per OH&S regulations.

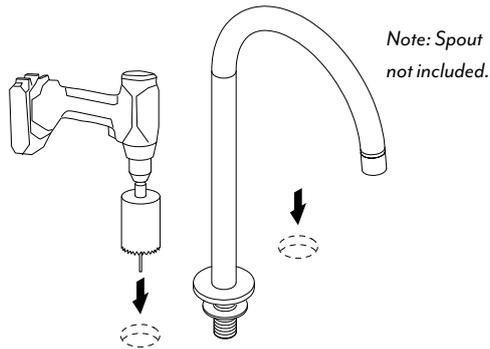


- ② 1. Screw spindle into in-bench breech, followed by the brass nut and plastic washer.


2. Push spindles through holes and secure to the bench top, ensure the base plates are **45mm** down from spindle top.

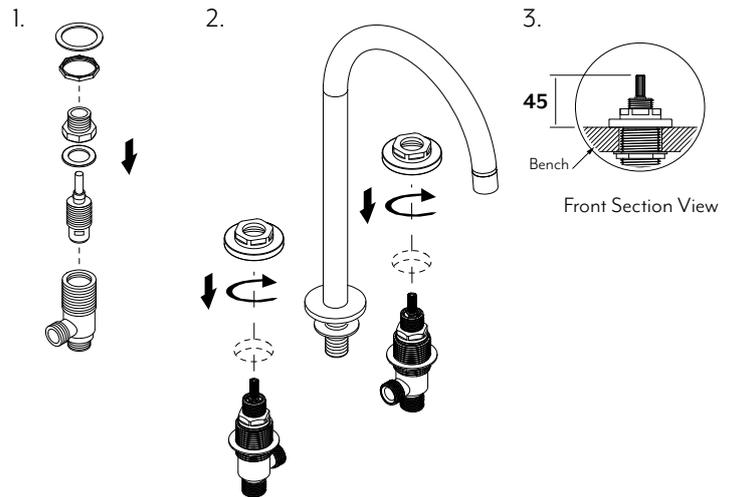

- ③ Fix handles by pushing them down and tightening the grub screws from the back. Screw compression tee fitting to spout.

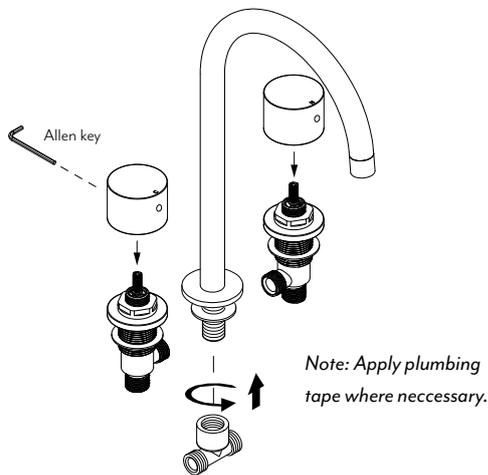

- ④ Connect pipework to spout from taps using flexi hoses. (**flexi hoses not included**)

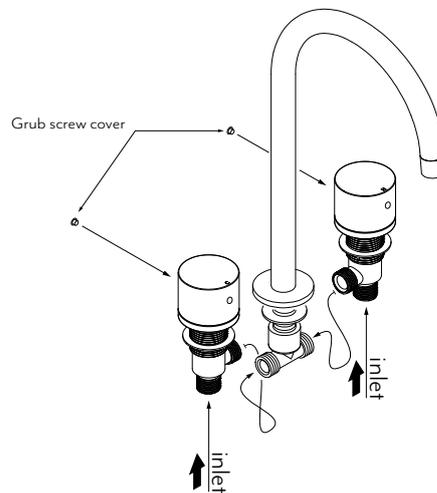

IN THE BOX - (In-bench)		IN THE BOX - (Handle kit)		IN THE BOX - (Spindle kit)	
	2 x in-bench breech		2 x handle		2 x spindle (1x R-hand turn, 1x L-hand turn)
	2 x washer		2 x base plate		2 x o-ring
	2 x large nut		2 x grub screw cover		2 x locking nut
	1 x compression tee fitting				
	2 x small nut				
	2 x olive				



Regularly clean with mild liquid detergent or soap and water.



DO NOT use cream cleaners or bleach. These substances are abrasive.



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material.