

MILANI PROGRESSIVE SINGLE MIXER

Lead Free
AS 3718:2021
WM-022852

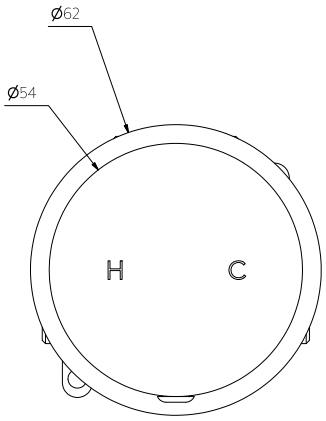

Front View

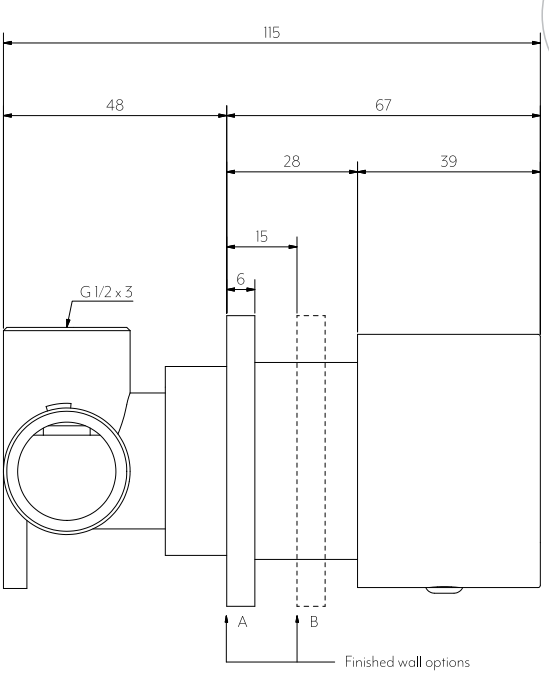

Side View


Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE	Domestic | Click here for warranty periods
MATERIAL	Handle: Stainless Steel 304 | In-wall body: DR Brass
TEMPERATURE RATING	Maximum continuous working temperature 75°C If the water temperature exceeds 75°C,an approved tempering valve must be fitted
PRESSURE RATING	Recommended minimum working pressure 150kPa Recommended maximum working pressure 500kPa Hot and cold water inlet pressure should be equal
SUITABLE HOT WATER UNITS	Storage tank: Yes Continuous Flow: Yes Gravity Feed: Not suitable
PACKAGING	Box 1 of 2 In-Wall Progressive Mixer Body (Rough-In) Box 2 of 2 Milani Progressive Handle Kit (Fit-Off)

Disclaimer: Products in this manual must by law be installed by licensed and registered tradespeople in accordance with the relevant standards. ABI and the manufacturer/distributor reserve the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. The information listed is correct at the time of publication, however ABI and the manufacturer/distributor takes no responsibility for printing errors. Copyright © ABI Interiors 2024 Pty Ltd

IN-WALL PROGRESSIVE MIXER BODY (304 SS)

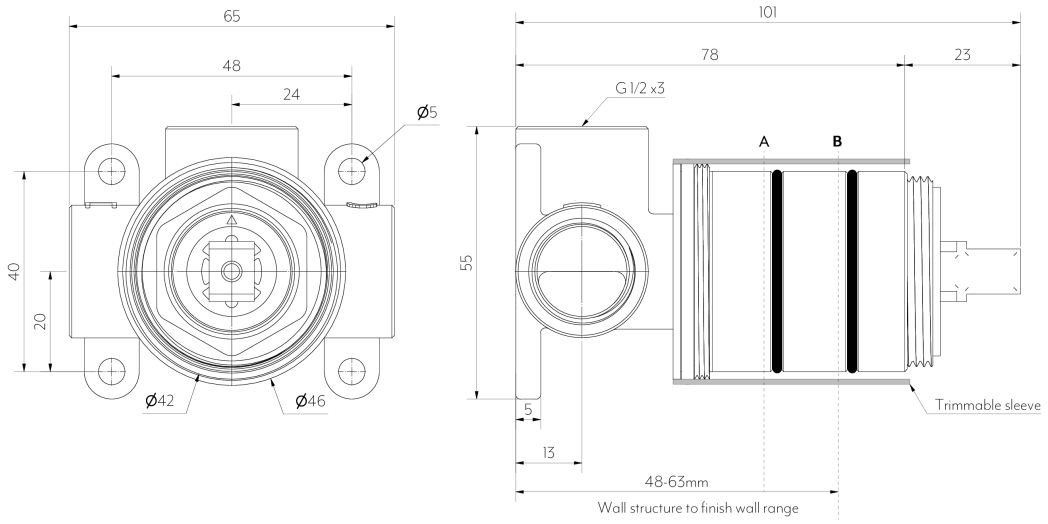

Front View

Side View

DISCLAIMER: To achieve infinity (interchangeable sleeves) finish wall must fall between point A and B. Trimmable sleeve can be cut to size and waterproofed to finished wall surface.

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE	Domestic/Commercial
MATERIAL	304 Stainless Steel
TEMPERATURE RATING	Maximum continuous working temperature 75°C If the water temperature exceeds 75°C,an approved tempering valve must be fitted
PRESSURE RATING	Recommended minimum working pressure 150kPa Recommended maximum working pressure 500kPa Hot and cold water inlet pressure should be equal
SUITABLE HOT WATER UNITS	Storage tank: Yes Continuous Flow: Yes Gravity Feed: Not suitable

Disclaimer: Products in this manual must by law be installed by licensed and registered tradespeople in accordance with the relevant standards. ABI and the manufacturer/distributor reserve the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. The information listed is correct at the time of publication, however ABI and the manufacturer/distributor takes no responsibility for printing errors. Copyright © ABI Interiors 2024 Pty Ltd

INSTALLATION GUIDE


Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.

ABI INTERIORS


ROUGH IN

See Specification image for finish wall setback

1. Use a level to mark out position. Screw in-wall body into wall structure with appropriate fixings

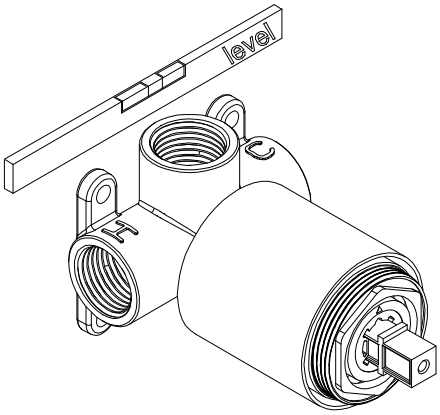


2. Connect hot, cold and mixed lines. TEST AND CHECK FOR LEAKS.

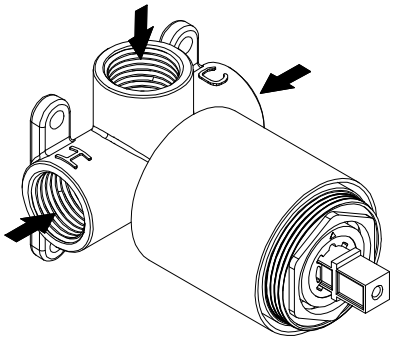


3. Sheeting and waterproof layer can now be applied. *Ensure cutout in finish wall is Ø48mm.

Trim Waterproof sleeve flush with finish wall using mutli tool.

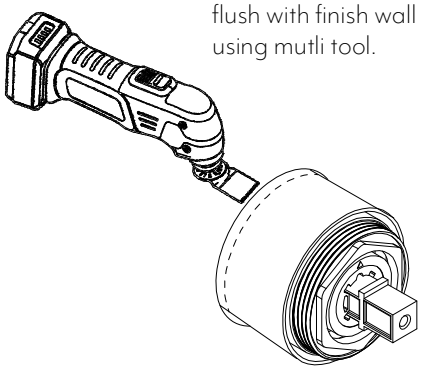

4. Silicone the waterproof sleeve to the wall. Ensuring no water can penetrate into the wall cavity.

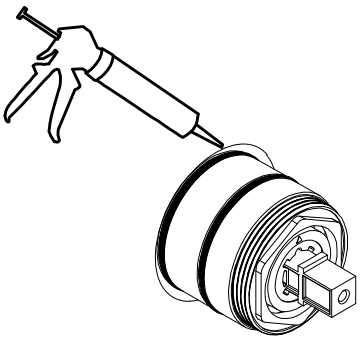

What's in the box




1 x Mixer body



1 x Cartridge




1 x Locking nut




1 x Waterproof sleeve



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive




DO NOT use cleaning pads with abrasive surfaces as this may scratch the material

INSTALLATION GUIDE


Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside hese countries, this product must be installed in compliance with the standards in your respective country.

NOTE: See Progressive Mixer Body installation guide for In-Wall set out.


1. Choose sleeve based on how far your In-wall protrudes from finish wall and slide on.

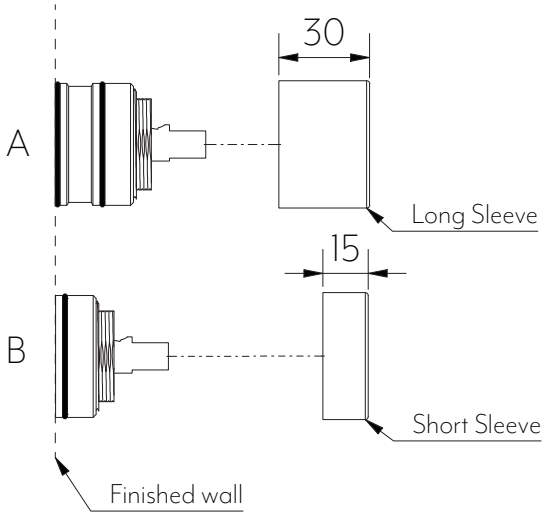


2. Slide back plate on. Screw dome on.

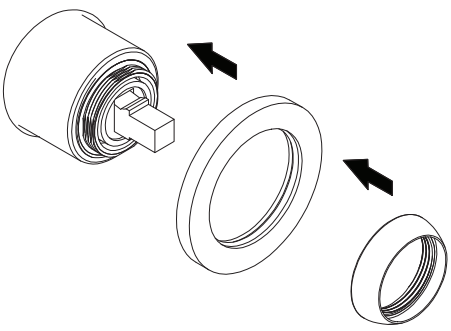

3. Tighten grub screw with allen key. Replace grub screw cap.

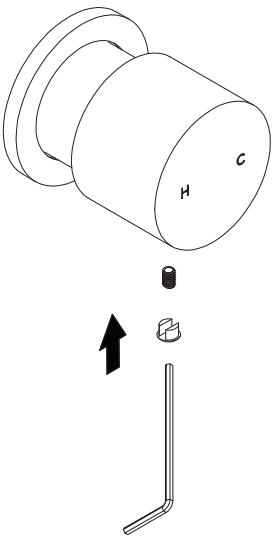


MIXER OPERATION

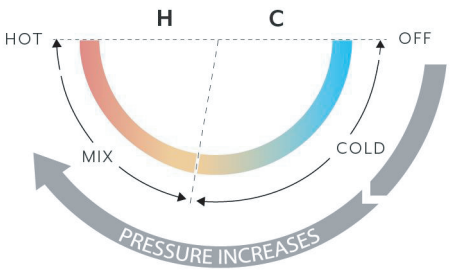


WHAT'S IN THE BOX

1. Back plate
2. Long sleeve
3. Dome
4. Handle
5. Grub screw cap
6. Grub screw
7. Short sleeve
8. Allen key

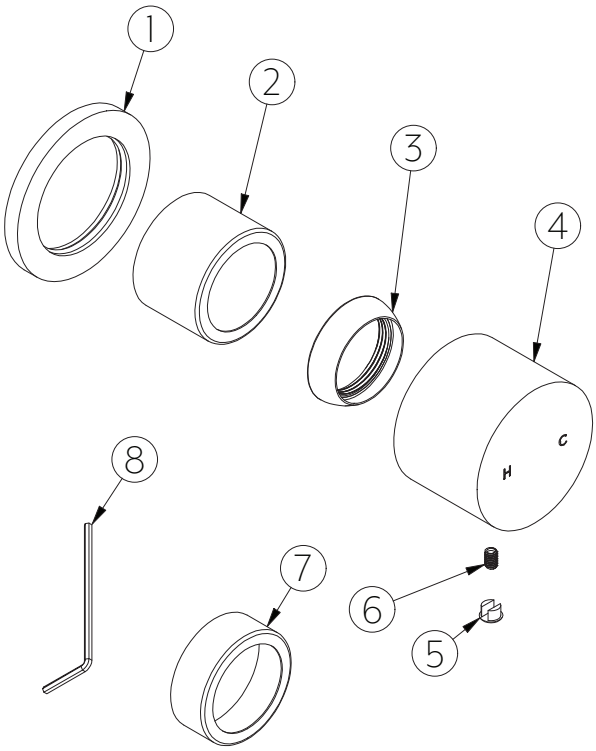




Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material