


Top View

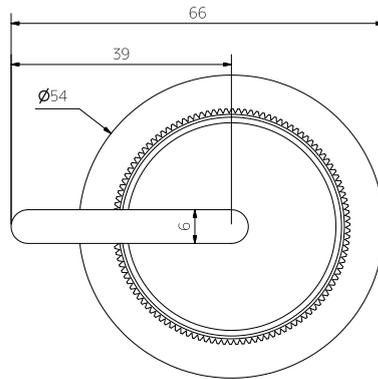

Front View

**Note:** Dimensions are nominal measurements only

## SPECIFICATIONS

### RECOMMENDED USE

Domestic, commercial

### CONSTRUCTION

Solid Brass

### PRESSURE RATING

Recommended minimum working pressure 150kPa  
Recommended maximum working pressure 500kPa  
Hot and cold water inlet pressure should be equal

### TEMPERATURE RATING

Maximum continuous working temperature 75°C. If the water temperature exceeds 75°C, an approved tempering valve must be fitted

### STANDARDS

AS/NZS 3718:2005, WM-022852

### PACKAGING

Box 1 of 2 - In-wall assembly taps - Spindle standard set (rough in)  
Box 2 of 2 - Namika Assembly Handle Kit (fit off)

# INSTALLATION GUIDE


**Note:** This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




**New Build:** Install breach in desired position (please refer to additional install information regarding breach setbacks).

**Retrofitting Existing:** Remove existing tapware & reseal body seats until shiny and smooth.


- ① Remove locking nut from spindle. Screw spindle into breach and hand tighten until rear of spindle meets the body seat, be sure not to over tighten. If necessary apply more pressure lightly with spanner.

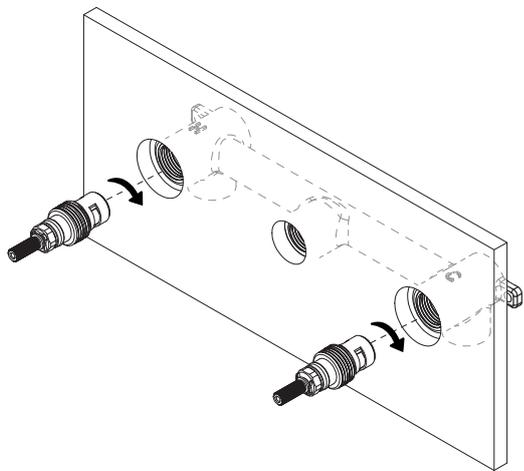


- ② Fit the fibre washer over the spindle. Screw the locking nut and tighten with spanner. TEST AND CHECK FOR LEAKS.

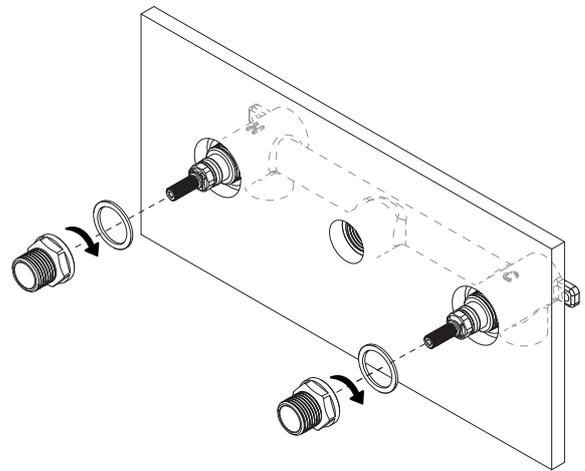

- ③ Install the sleeve onto the locking nut and hand tighten. Slide backplate over sleeve.

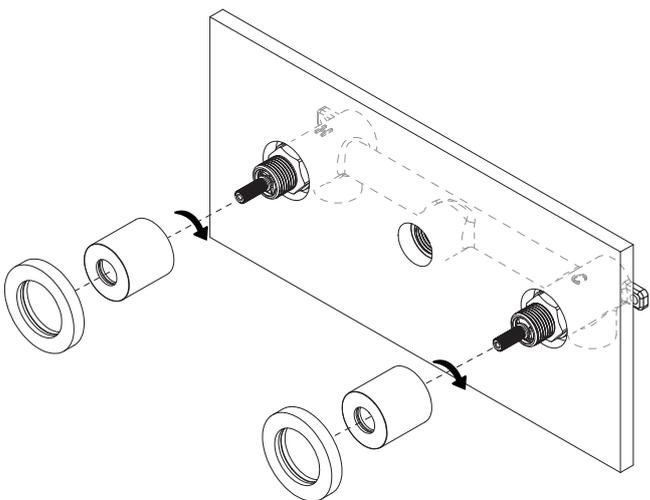


- ④ Fit the handle to the spindle and tighten grub screw with Allen key.

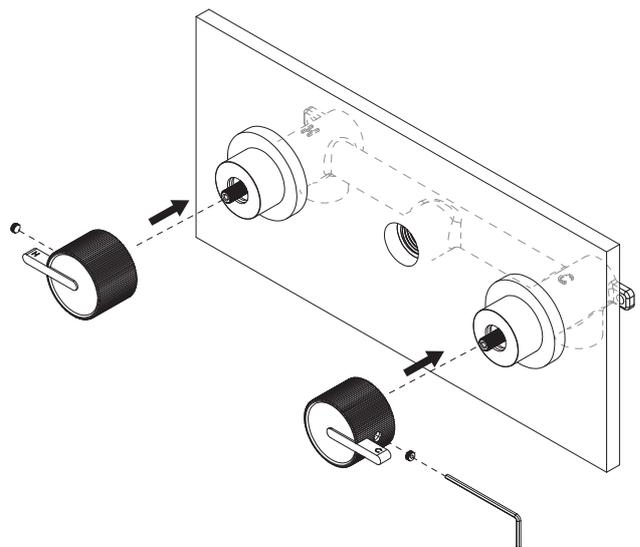

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive




DO NOT use cleaning pads with abrasive surfaces as this may scratch the material

# ASSEMBLY SETUP GUIDE




**Note:** This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.


## Example One: Offset basin mixer/bath spout setup

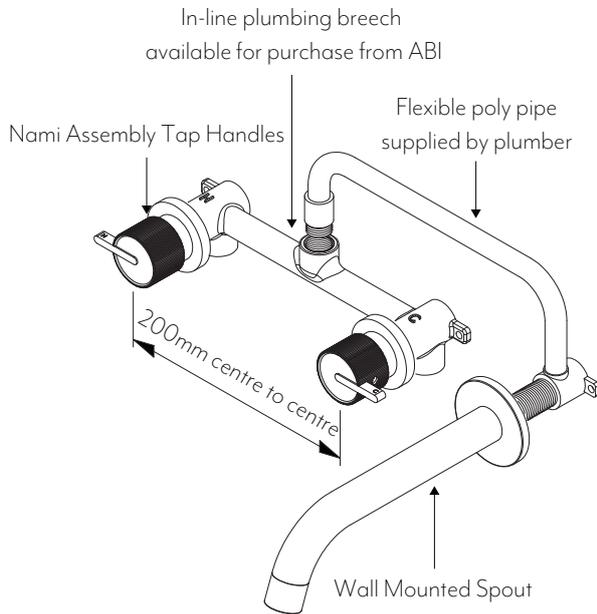

## Example Two: Centred basin mixer/bath spout setup

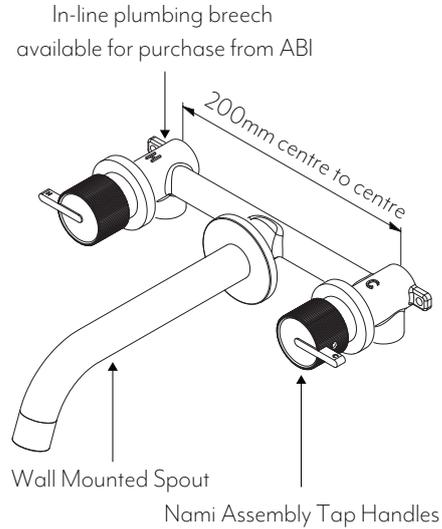


## Example Three: Shower Setup

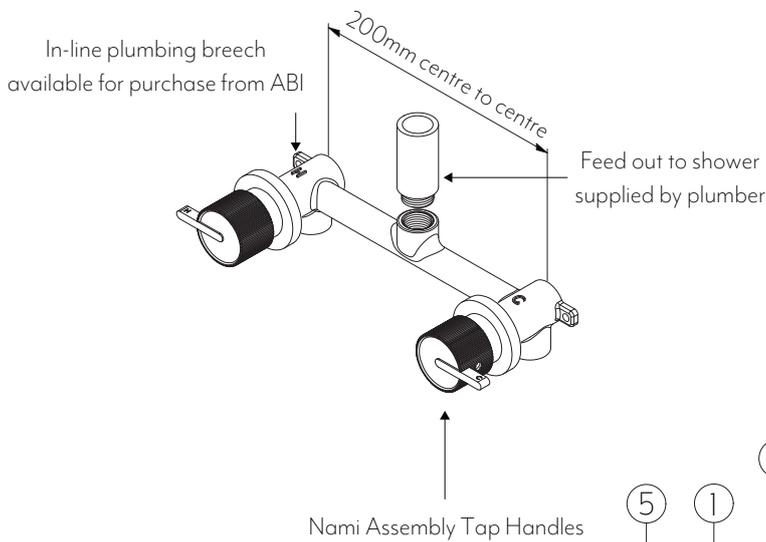

### WHAT'S IN THE BOX


1. Handle x2
2. Backplate x2
3. Sleeve x2
4. Spindle x2
5. Grub screw x2
6. Allen key x1

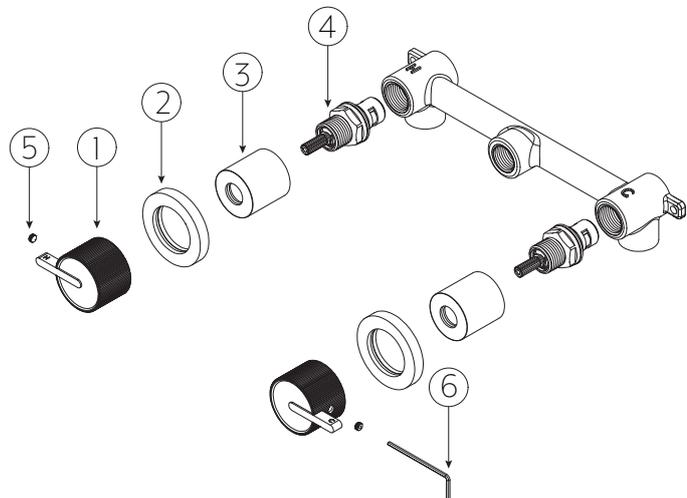

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive




DO NOT use cleaning pads with abrasive surfaces as this may scratch the material


# SETBACK GUIDE




**Note:** This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.

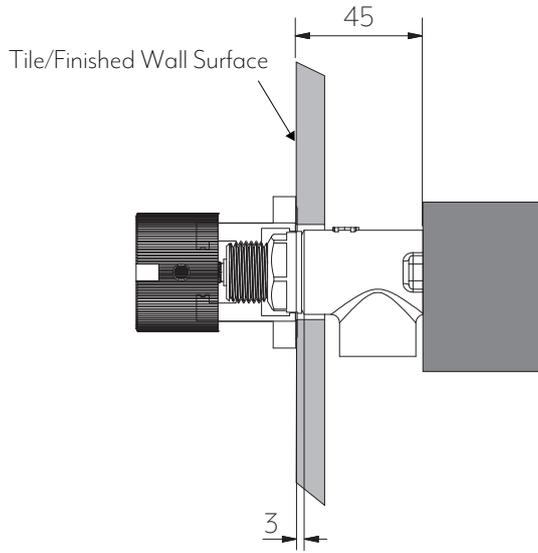


Minimum distance between nogging and finished wall surface is 45 mm when using the standard spindle provided or 3 mm from in-wall breach to finished wall surface.

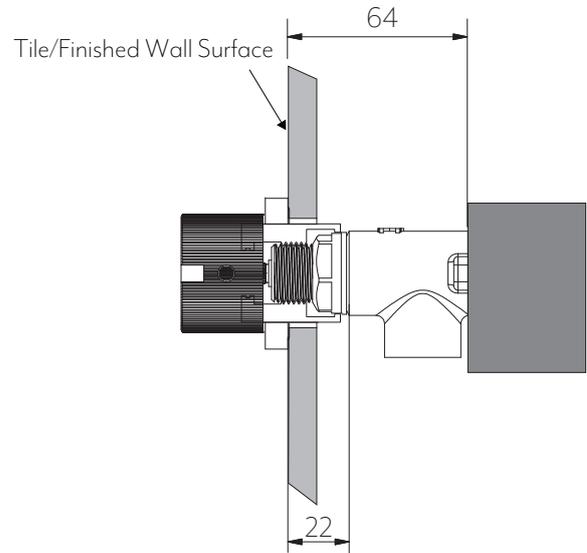

Maximum distance between nogging and finished wall surface is 64 mm when using the standard spindle provided or 22 mm from in-wall breach to finished wall surface.

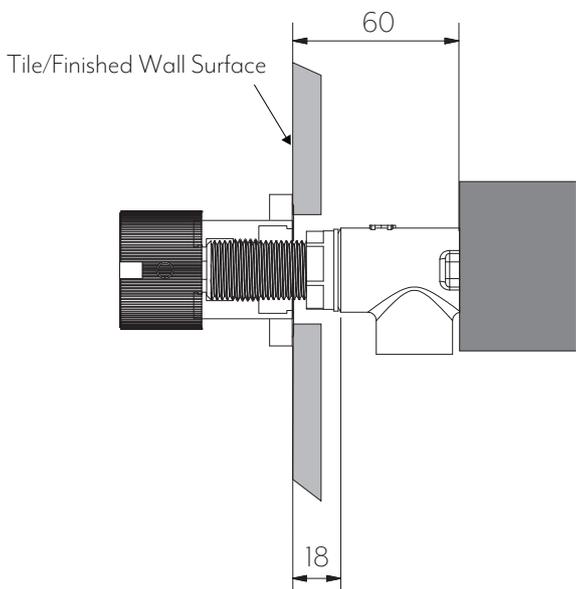

Minimum distance between nogging and finished wall surface is 60 mm when using the extended spindle (purchased separately) or 14 mm from in-wall breach to finished wall surface.

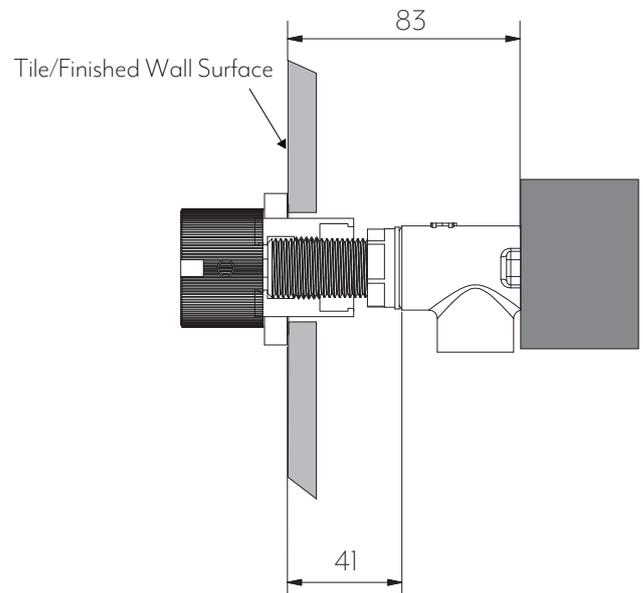


Maximum distance between nogging and finished wall surface is 83 mm when using the extended spindle (purchased separately) or 41 mm from in-wall breach to finished wall surface.



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material