

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE | WARRANTY

Domestic / Commercial | [Click here for warranty periods](#)

MATERIAL

Stainless Steel 304

TEMPERATURE RATING

Maximum continuous working temperature 75°C
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

PRESSURE RATING


Recommended minimum working pressure 150kPa
Recommended maximum working pressure 500kPa
Hot and cold water inlet pressure should be equal

SUITABLE HOT WATER UNITS

Storage tank: Yes
Continuous Flow: Yes
Gravity Feed: Not suitable

STANDARDS

WELS 5 Star, 6L/min, T44258

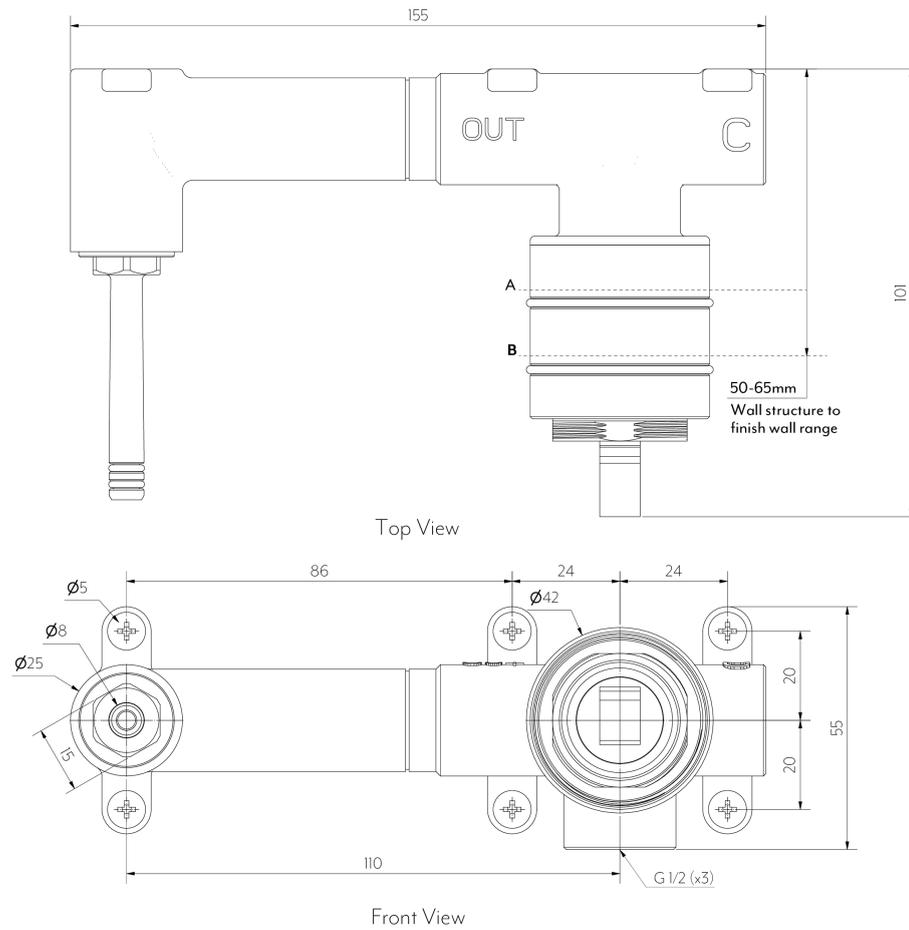

DISCLAIMER: Two sleeves are provided with the handle kit to accommodate different setbacks of the in-wall from the finish wall. Ensure finish wall is located between Point **A** (minimum) and Point **B** (maximum).

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE

Domestic / Commercial

MATERIAL

Stainless Steel 304

TEMPERATURE RATING

Maximum continuous working temperature 75°C
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

PRESSURE RATING

Recommended minimum working pressure 150kPa
Recommended maximum working pressure 500kPa
Hot and cold water inlet pressure should be equal

SUITABLE HOT WATER UNITS

Storage tank: Yes
Continuous Flow: Yes
Gravity Feed: Not suitable

INSTALLATION GUIDE


Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




ROUGH IN

See specification image for finish wall setback


① Screw in-wall body into wall structure with provided screws.

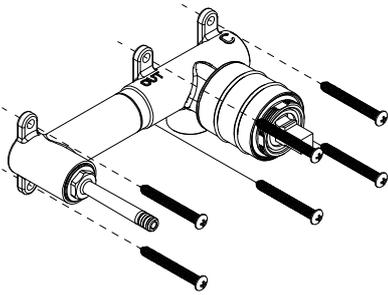

② Connect hot and cold lines. TEST AND CHECK FOR LEAKS.




③ Sheetting and waterproof layer can now be applied.
*Ensure cutout in finish wall is $\varnothing 50\text{mm}$ diameter for the mixer handle and $\varnothing 27\text{mm}$ for the spout.

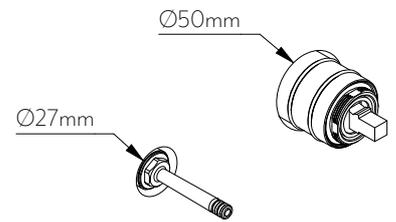

WHAT'S IN THE BOX


- 1. Body
- 2. Fixing screws (x6)
- 3. Cartridge
- 4. Locking nut
- 5. Spout nipple

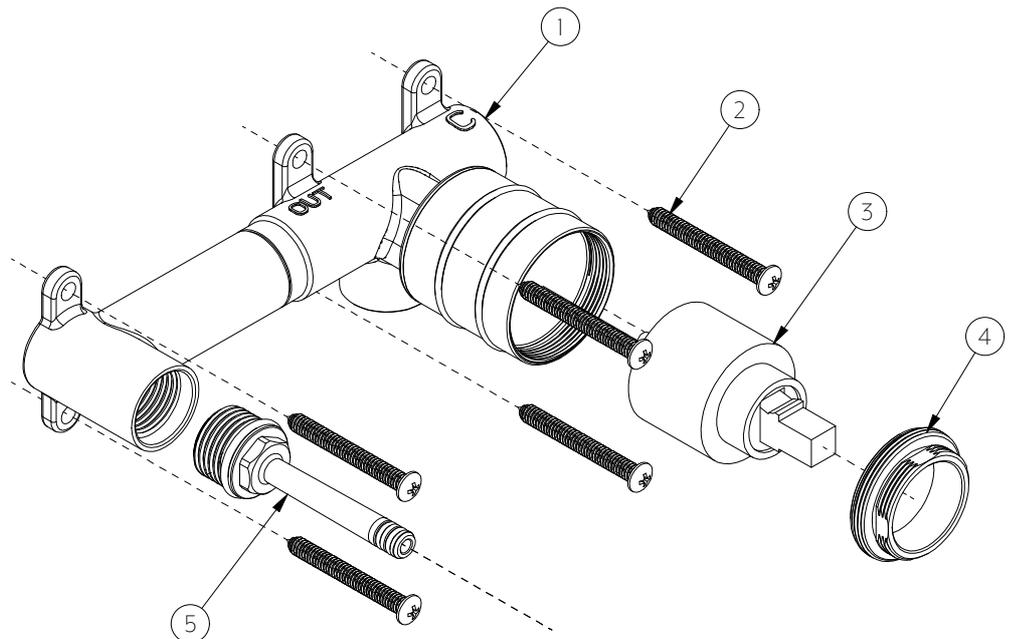

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material


INSTALLATION GUIDE

Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




NOTE: See 'In-wall wall-mounted set body -SS304' installation guide for in-wall set out.


- ① Slide on sleeve and screw on dome securing in place.

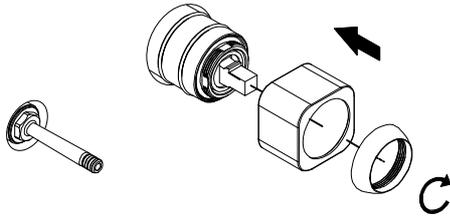


- ② Screw spout to the back plate with provided screws. Ensure screws are countersunk on the correct side.

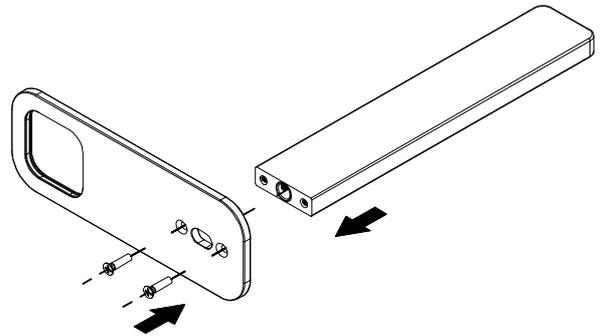


- ③ Slide back plate and spout over sleeve and spout connection.

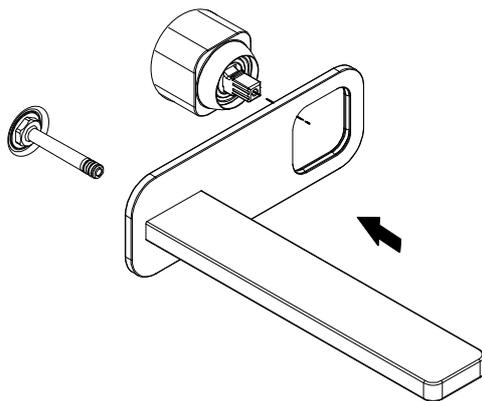


- ④ Slide on handle and tighten grub screw, then insert grub screw cover.

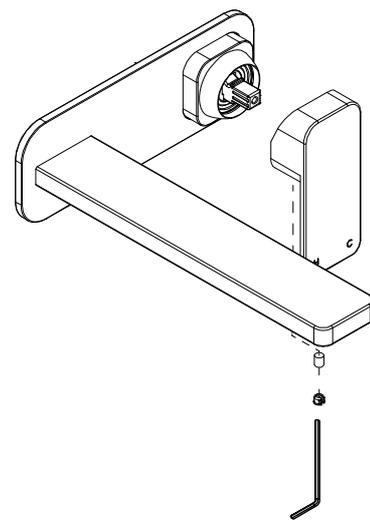

- ⑤ 1. Tighten both grub screws under spout.
2. Tighten aerator with provided tool so that it cannot be removed by hand.

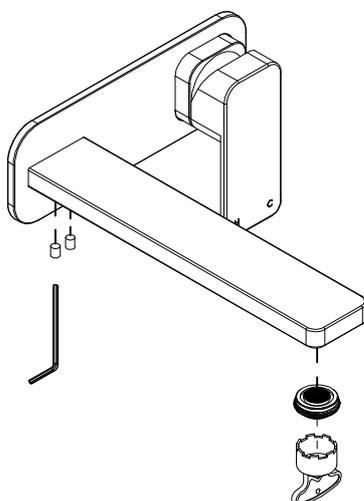


What's in the box		
		
1x Spout	1x Handle	2x Grub screw cover
		
1x Sleeve	1x Back plate	1x Aerator Key



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material