# SHOWER HOSE - SOLID BRASS

WaterMark
AS/NZS 3662:2005
WMK26641

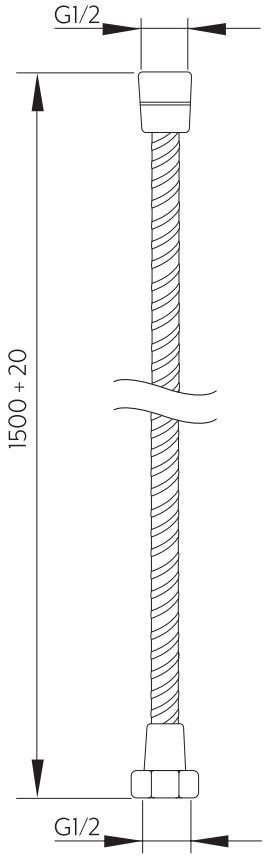


**Note:** Dimensions are nominal measurements only

## SPECIFICATIONS

| | |
|---|---|
| RECOMMENDED USE | Domestic |
| MATERIAL | Solid Brass |
| TEMPERATURE RATING | Maximum continuous working temperature 75°C<br>If the water temperature exceeds 75°C,an approved tempering valve must be fitted |
| PRESSURE RATING | Recommended minimum working pressure 150kPa<br>Recommended maximum working pressure 500kPa<br>Hot and cold water inlet pressure should be equal |

Disclaimer: Products in this manual must by law be installed by licensed and registered tradespeople in accordance with the relevant standards. ABI and the manufacturer/distributor reserve the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. The information listed is correct at the time of publication, however ABI and the manufacturer/distributor takes no responsibility for printing errors. Copyright © ABI Interiors 2024 Pty Ltd