

Top View



Front View

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE Domestic/ Commercial

MATERIAL Stainless Steel 316

MOUNTING HARDWARE INCLUDED Yes


FIXING DISTANCE 700mm centre to centre

INSTALLATION GUIDE

Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




- 1 Remove bracket from the towel rail using the Allen key to loosen the grub screw. Install bracket by fastening the supplied screws into the wall plugs.
- 2 Place the towel rail onto the bracket and firmly tighten grub screws using an Allen key.

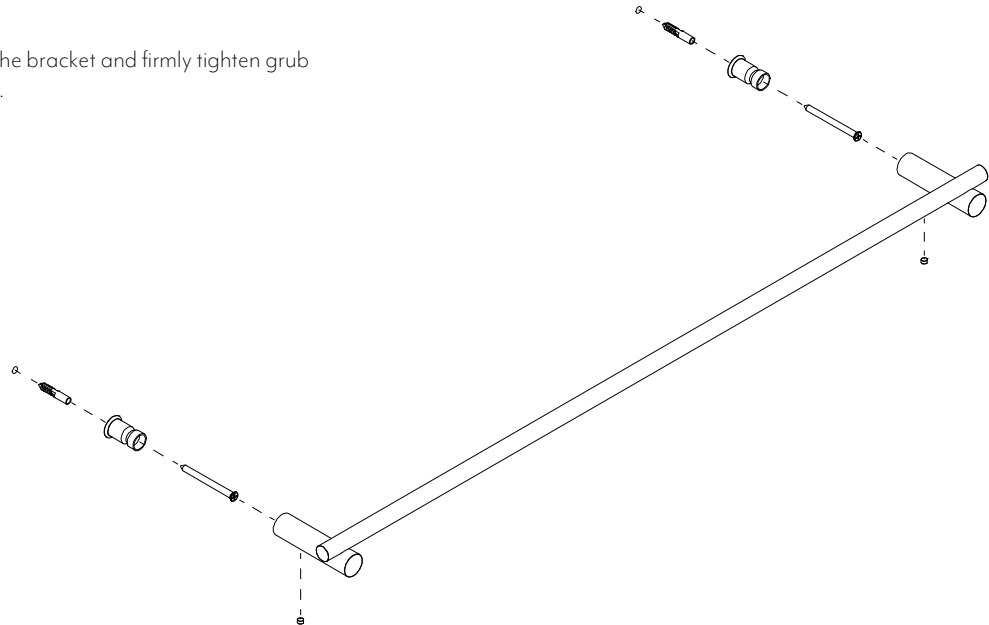

Optional: Backplate Fixing Bracket

Use this method when retro-fitting into walls with compromised structures. (sold separately)

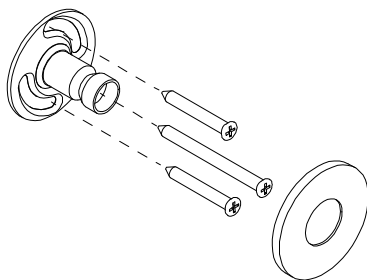


In The Box			
Towel rail x1	Wall bracket x2	Fixing screw x2	Wall plug x2



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material