


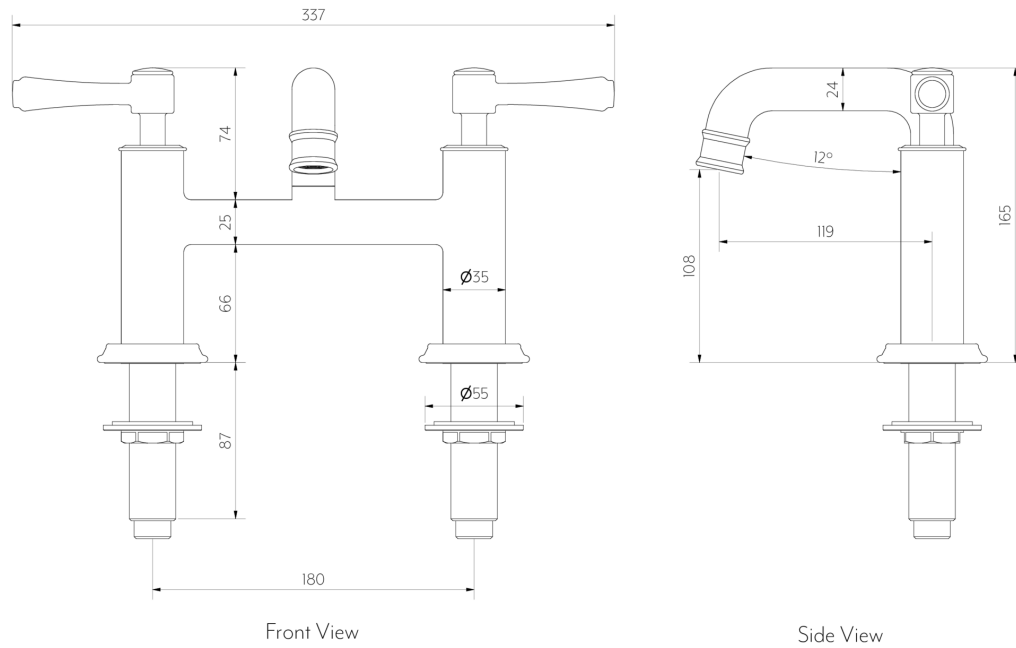

Note: Dimensions are nominal measurements only

SPECIFICATIONS


RECOMMENDED USE	Domestic/Commercial
MATERIAL	Solid Brass
TEMPERATURE RATING	Maximum continuous working temperature 75°C If the water temperature exceeds 75°C, an approved tempering valve must be fitted
PRESSURE RATING	Recommended minimum working pressure 0.2 Bar Recommended maximum working pressure 5 Bar Hot and cold water inlet pressure should be equal
SUITABLE HOT WATER UNITS	Storage tank: Yes Continuous flow: Yes Gravity fed: Suitable

INSTALLATION GUIDE


Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.

ABI
INTERIORS

- 1 Mark holes 180mm apart in bench top at desired position and drill 2x 35mm holes.

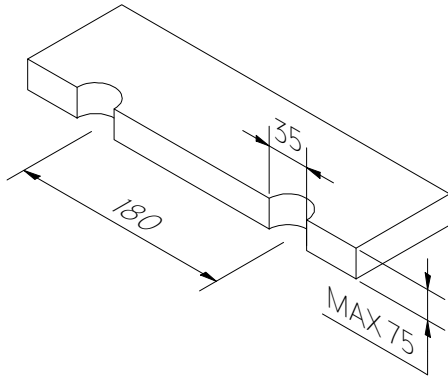


- 3 Fix washer and tighten fixing bracket to secure bridge mixer.

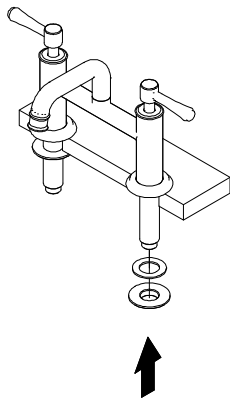


- 5 Connect flexi hoses to water supply. Test and commission.


Note: Tighten aerator so that it cannot be removed by hand.

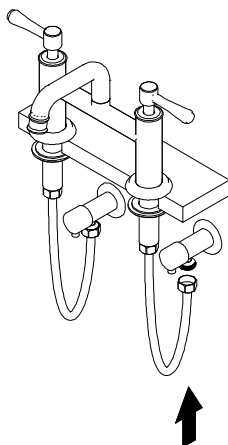

- 2 Remove fixing brackets and washers and insert bridge mixer into drilled holes.

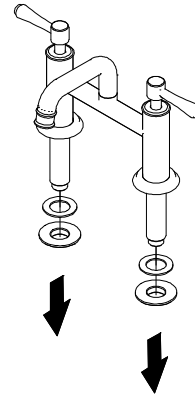

- 4 Ensuring rubbers are in place before screwing flexi hoses into the the bridge mixer.

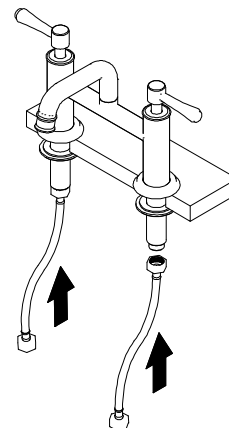


IN THE BOX	
	1x Basin Bridge Mixer
	2x Flexi hoses
	2x Rubber washers
	2x Fixing brackets
	2x 3/4 Inch adaptor



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material