


Side View

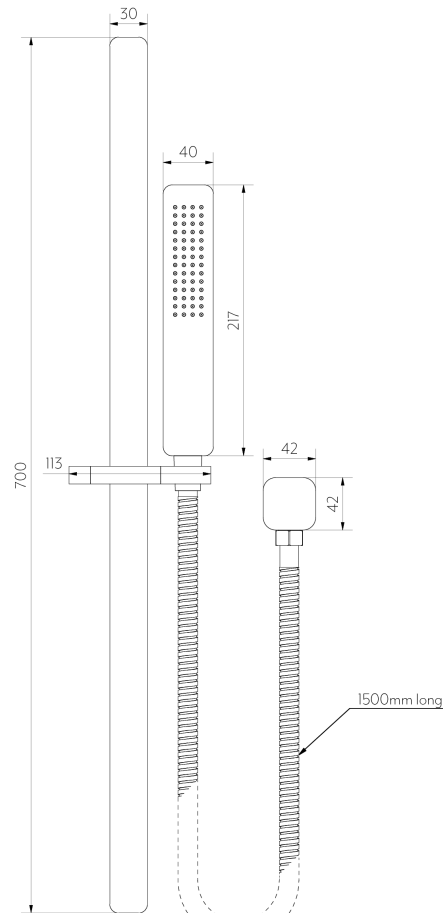

Front View

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE | WARRANTY


Domestic / Commercial | [Click here for warranty periods](#)

MATERIAL

304 Stainless Steel

PACKAGING

Box 1: Nesso Shower Rail
Box 2: Nesso Shower BP
Box 3: Nesso Hand Shower
Box 4: Shower Hose

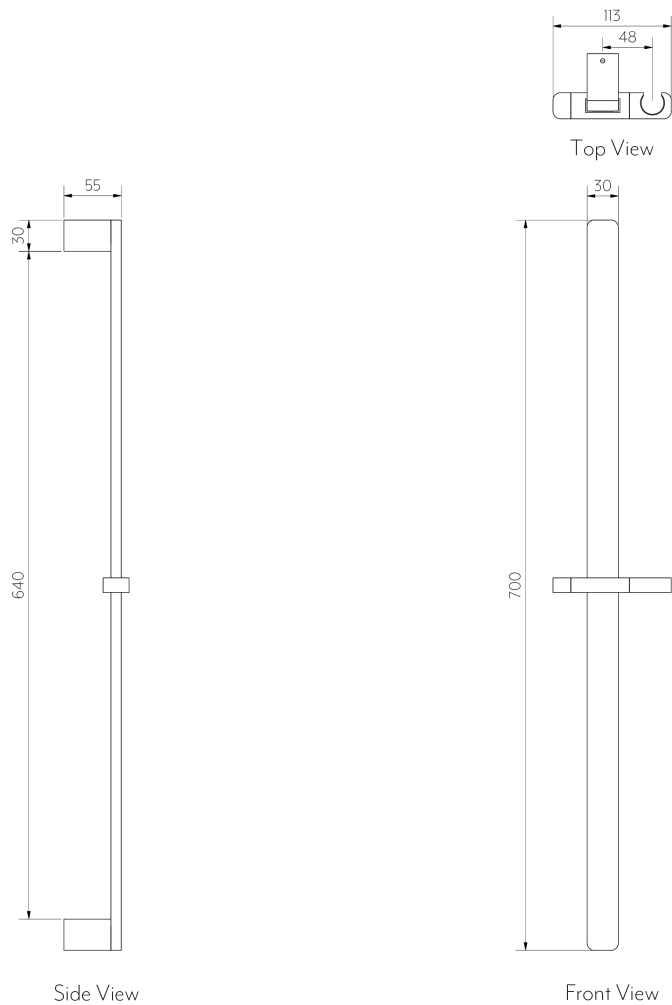

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE Domestic / Commercial

MATERIAL Stainless Steel 304


MOUNTING HARDWARE INCLUDED Yes

INSTALLATION GUIDE


Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




- 1 Measure out location of fixing bracket holes. 665-675mm
Remove grub screws and brackets from rail.

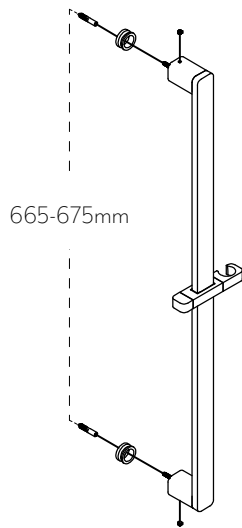


- 2 Drill holes with appropriate drill bit and install plugs into wall.

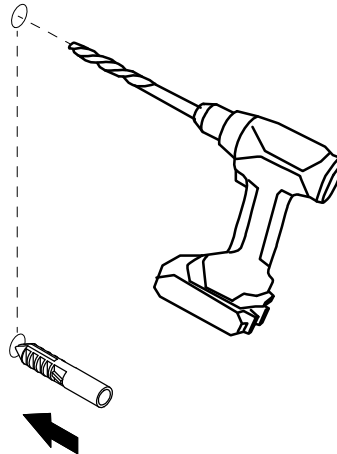

- 3 Screw brackets to the wall using provided screws.




- 4 Install shower rail onto brackets and tighten grub screws with provided Allen Key.



IN THE BOX

1 x Shower Rail



2 x Wall plug



2 x M4 Screw




2 x Bracket




Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material

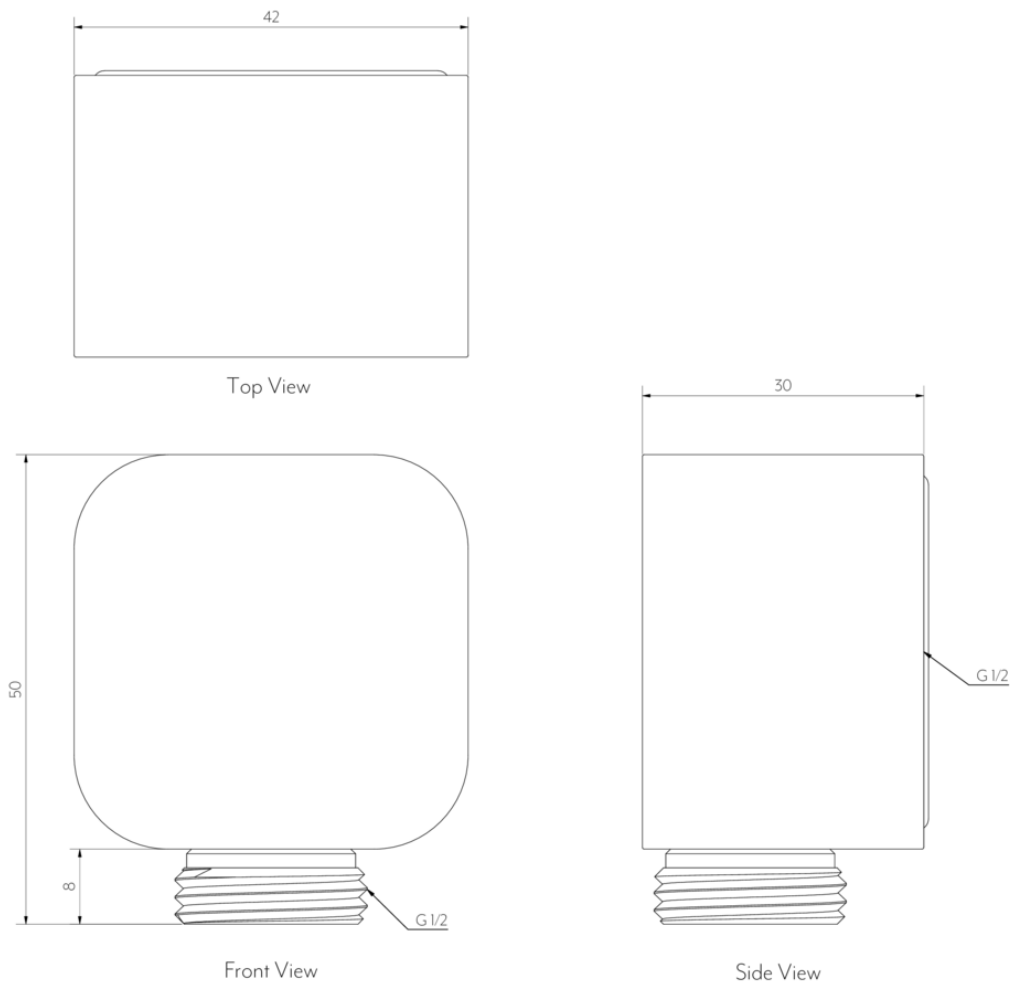

Note: Dimensions are nominal measurements only

SPECIFICATIONS




RECOMMENDED USE	Domestic / Commercial
MATERIAL	Stainless Steel 304
TEMPERATURE RATING	Maximum continuous working temperature 75°C If the water temperature exceeds 75°C,an approved tempering valve must be fitted
PRESSURE RATING	Recommended minimum working pressure 0.2 Bar Recommended maximum working pressure 5 Bar Hot and cold water inlet pressure should be equal
SUITABLE HOT WATER UNITS	Storage tank: Yes Continuous Flow: Yes Gravity Feed: Suitable

INSTALLATION GUIDE



Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.

ABI
INTERIORS

- 1 Ensure rubber o-ring is correctly recessed into BP.
- 2 Use a hack saw and trim wall outlet so that a maximum of 13mm protrudes from wall finish.
- 3 Apply thread tape to G 1/2 water outlet.

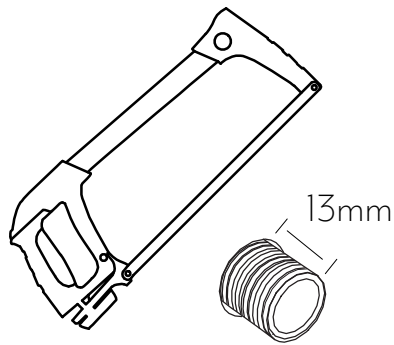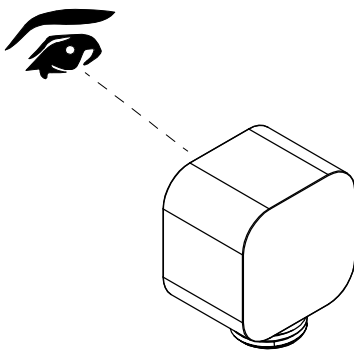


- 4 Install BP onto water outlet.
*To ensure level installation apply sufficient thread tape to outlet.

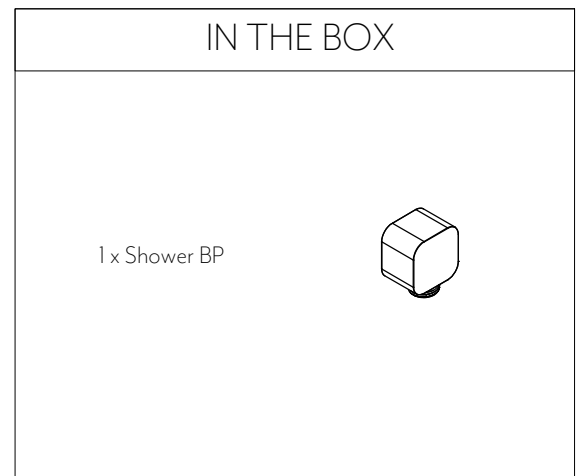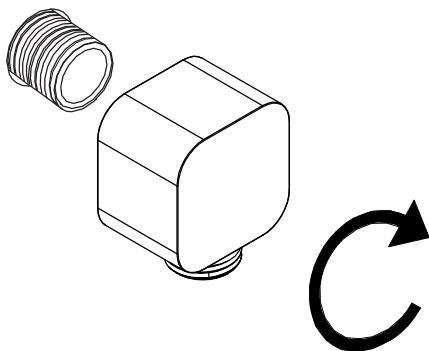

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive




DO NOT use cleaning pads with abrasive surfaces as this may scratch the material

1/2 INCH MALE ADAPTOR INSTALLATION GUIDE




Note: This product must be installed by a licensed tradesperson.
This is a general installation guide - there are many factors that are involved that can alter the installation method.


① Apply teflon tape to 1/2 inch male adaptor.




② Fit 1/2 inch male adaptor to female BP and tighten with a 12 mm metric Allan key.

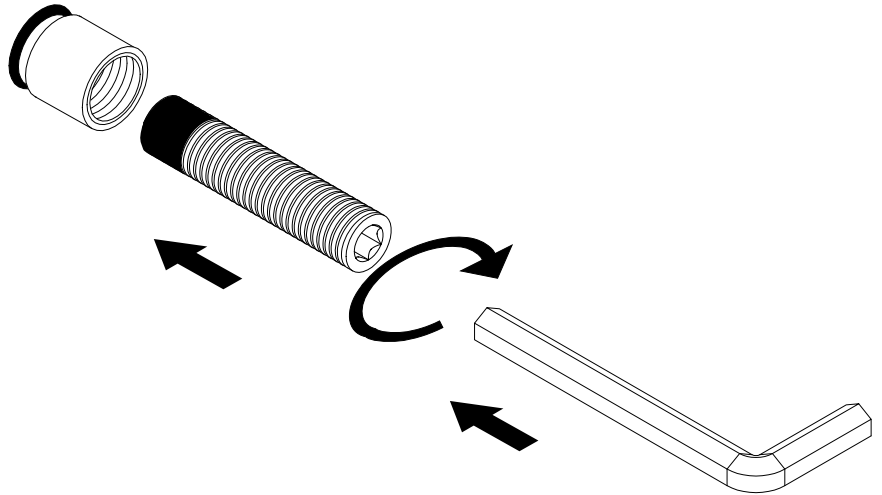

③ Cut 1/2 inch male adaptor to suit wall thickness and product.

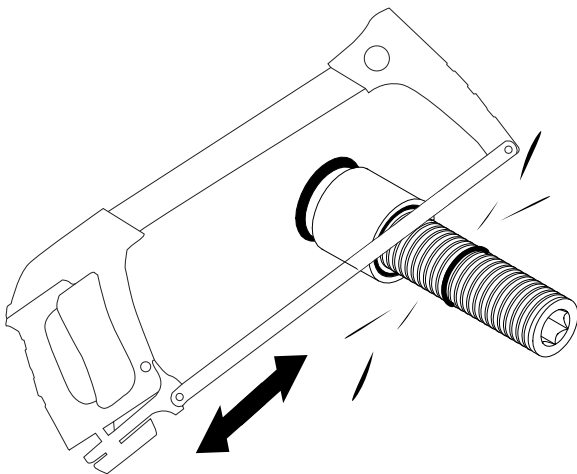

NESSO HAND SHOWER - SPECIFICATION

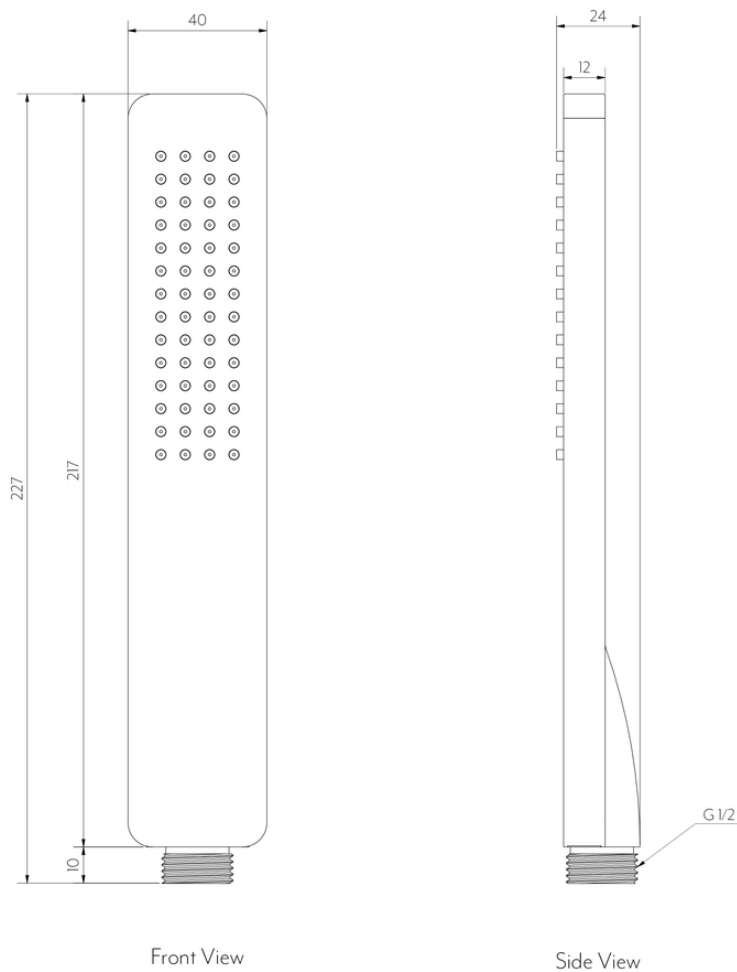

Note: Dimensions are nominal measurements only

SPECIFICATIONS


RECOMMENDED USE	Domestic / Commercial
MATERIAL	Stainless Steel 304
TEMPERATURE RATING	Maximum continuous working temperature 75°C If the water temperature exceeds 75°C,an approved tempering valve must be fitted
PRESSURE RATING	Recommended minimum working pressure 0.5 Bar Recommended maximum working pressure 5 Bar Hot and cold water inlet pressure should be equal
SUITABLE HOT WATER UNITS	Storage tank: Yes Continuous Flow: Yes Gravity Feed: Suitable

INSTALLATION GUIDE

Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.

ABI
INTERIORS


- 1 Ensure flow controller is correctly recessed into hand shower.
- 2 Ensure rubber washer is inserted into shower hose end.
- 3 Screw shower hose to hand shower.

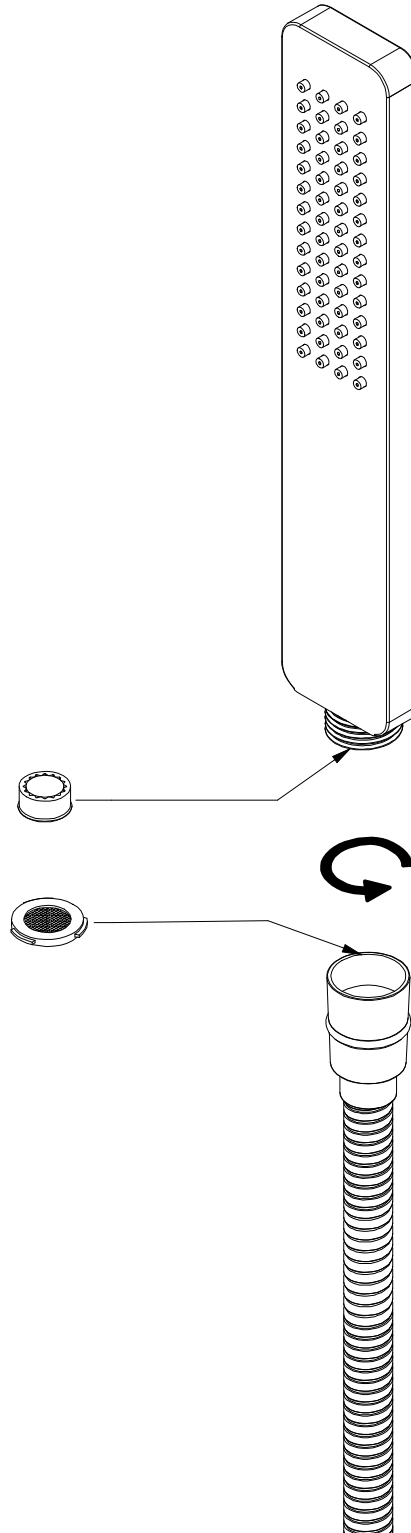

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material