



Top View

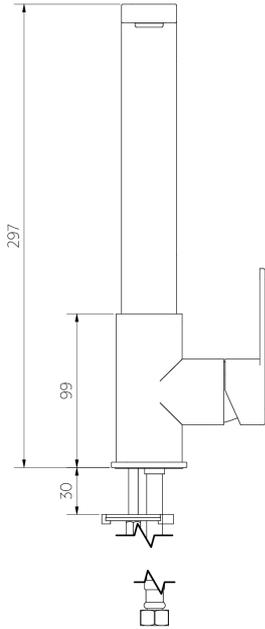

Front View

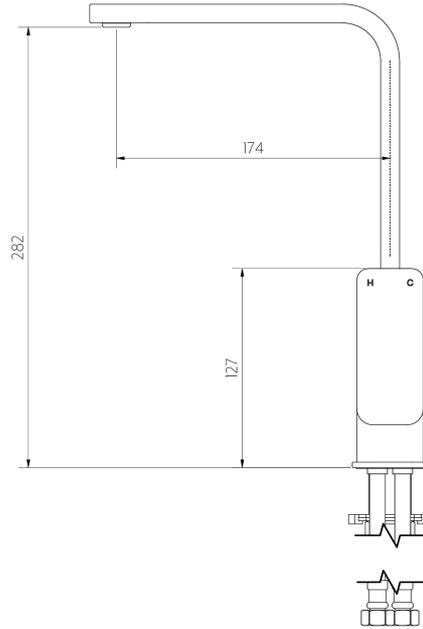

Side View

**Note: Dimensions are nominal measurements only**

## SPECIFICATIONS

### RECOMMENDED USE | WARRANTY

Domestic / Commercial | [Click here for warranty periods](#)

### MATERIAL

Stainless Steel 304

### TEMPERATURE RATING

Maximum continuous working temperature 75°C  
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

### PRESSURE RATING

Recommended minimum working pressure 0.2 Bar  
Recommended maximum working pressure 5 Bar  
Hot and cold water inlet pressure should be equal

### SUITABLE HOT WATER UNITS


Storage tank: Yes  
Continuous Flow: Yes  
Gravity Feed: Suitable

# INSTALLATION GUIDE


**Note:** This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




- ① Mark hole in bench top at desired location and drill 35mm hole.

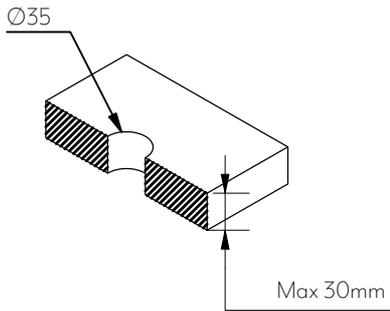


- ② Install fixing rods (1) and flexi's (2) into the kitchen mixer.

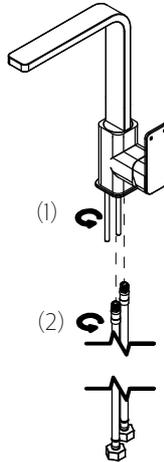


- ③ Feed flexi hoses through bench cutout and install mixer in desired orientation.

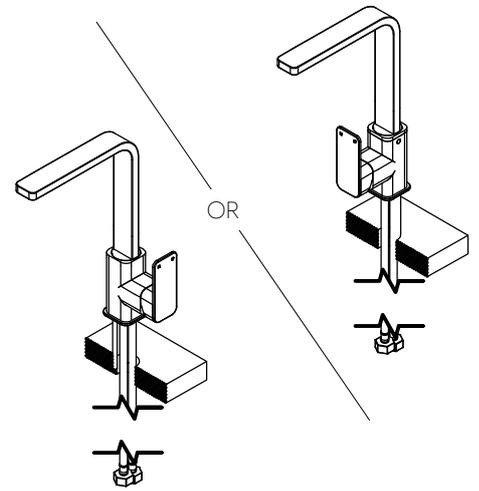


- ④ Install rubber washer followed by metal washer onto fixing rods. Secure in place with locking nuts. \*ensure nuts are tightened sufficiently with a deep socket and wrench.

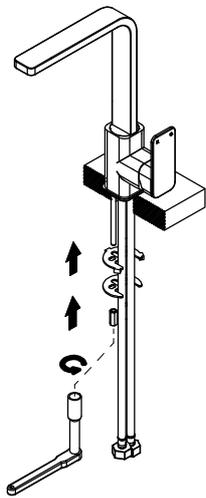



- ⑤ Connect flexi hoses to water supply. **Test and commission.**

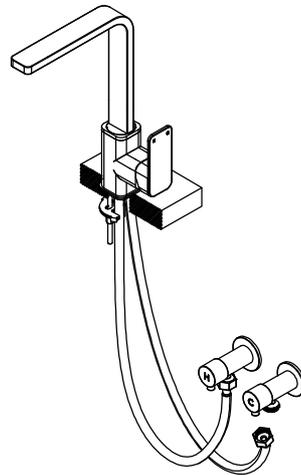

- ⑥ Tighten aerator with provided tool so that it is not removable by hand.



## IN THE BOX



1 x Rubber washer



2 x Locking nuts



1 x Metal washer




1x Aerator tool



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material