

**Note: Dimensions are nominal measurements only**

## SPECIFICATIONS

### RECOMMENDED USE

Domestic / Commercial

### MATERIAL

Stainless Steel 304

### TEMPERATURE RATING

Maximum continuous working temperature 75°C  
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

### PRESSURE RATING


Recommended minimum working pressure 0.5 Bar  
Recommended maximum working pressure 5 Bar  
Hot and cold water inlet pressure should be equal

### SUITABLE HOT WATER UNITS

Storage tank: Yes  
Continuous Flow: Yes  
Gravity Feed: Suitable

### BOXES IN SET

Box 1 of 3 In-wall Minimal Diverter Mixer Body (Rough-In)  
Box 2 of 3 Nesso Shower Top Diverter Handle Kit (Fit-Off)  
Box 3 of 3 Nesso Minimal Mixer Handle Kit (Fit-Off)

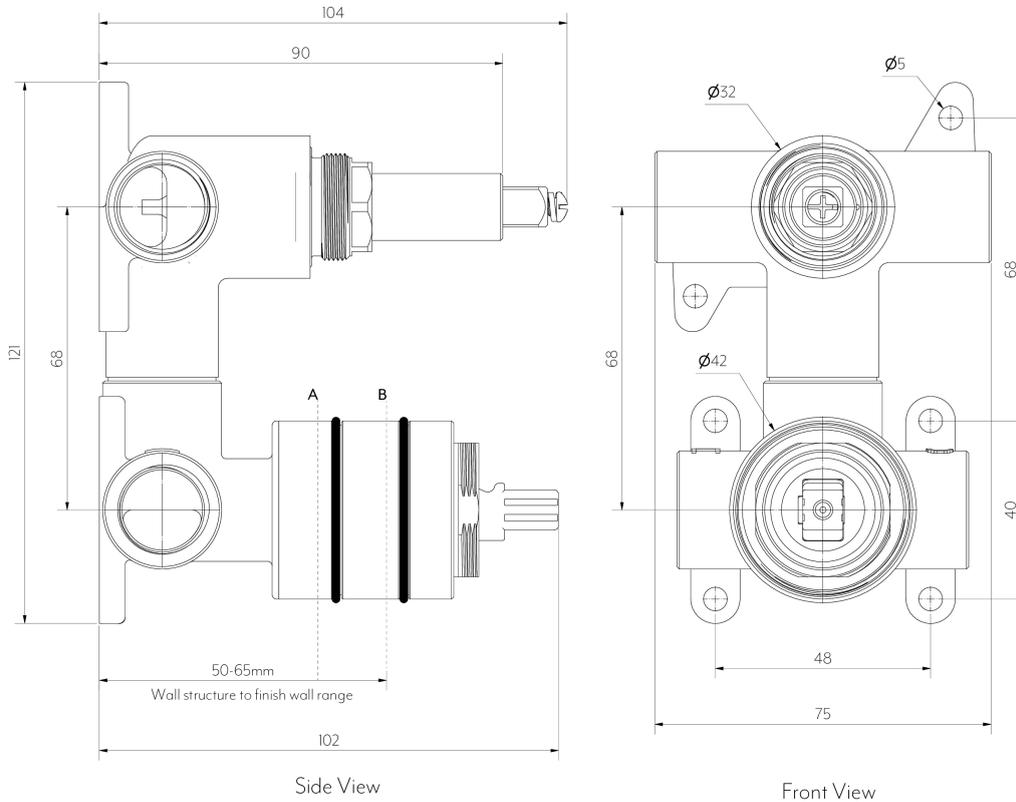

**Note:** Dimensions are nominal measurements only

## SPECIFICATIONS

### RECOMMENDED USE | WARRANTY

Domestic / Commercial | [Click here for warranty periods](#)

### MATERIAL

Stainless Steel 304

### TEMPERATURE RATING

Maximum continuous working temperature 75°C  
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

### PRESSURE RATING

Recommended minimum working pressure 150kPa  
Recommended maximum working pressure 500kPa  
Hot and cold water inlet pressure should be equal

### SUITABLE HOT WATER UNITS

Storage tank: Yes  
Continuous Flow: Yes  
Gravity Feed: Not suitable

# INSTALLATION GUIDE


**Note:** This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




## ROUGH IN

See specification image for finish wall setback


- ① Screw in-wall body into wall structure with provided screws.

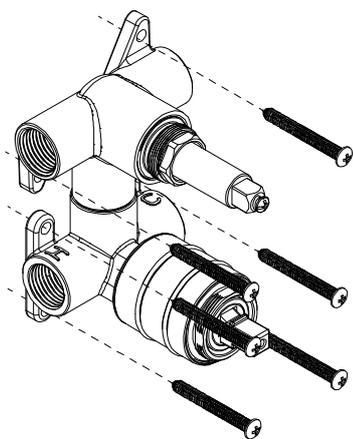

- ② **\*NOTE:** Two locking nuts are included in packaging. Please ensure correct one is installed for the chosen range of tapware prior to connecting water supply. Connect hot, cold and both mixed lines. **TEST AND CHECK FOR LEAKS.**

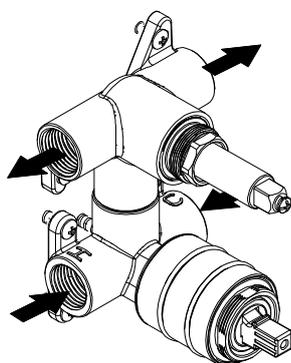


- ③ Sheetting and waterproof layer can now be applied. **\*Ensure cutout in finish wall is Ø50mm for the mixer handle and Ø35mm for the diverter.**

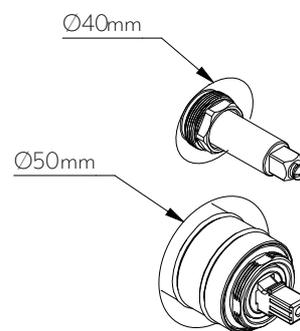

## WHAT'S IN THE BOX


1. Body
2. Fixing screws (x6)
3. Diverter cartridge
4. Mixer cartridge
5. Locking nut (NESSO)
6. Locking nut (SOLA & ALIRO)

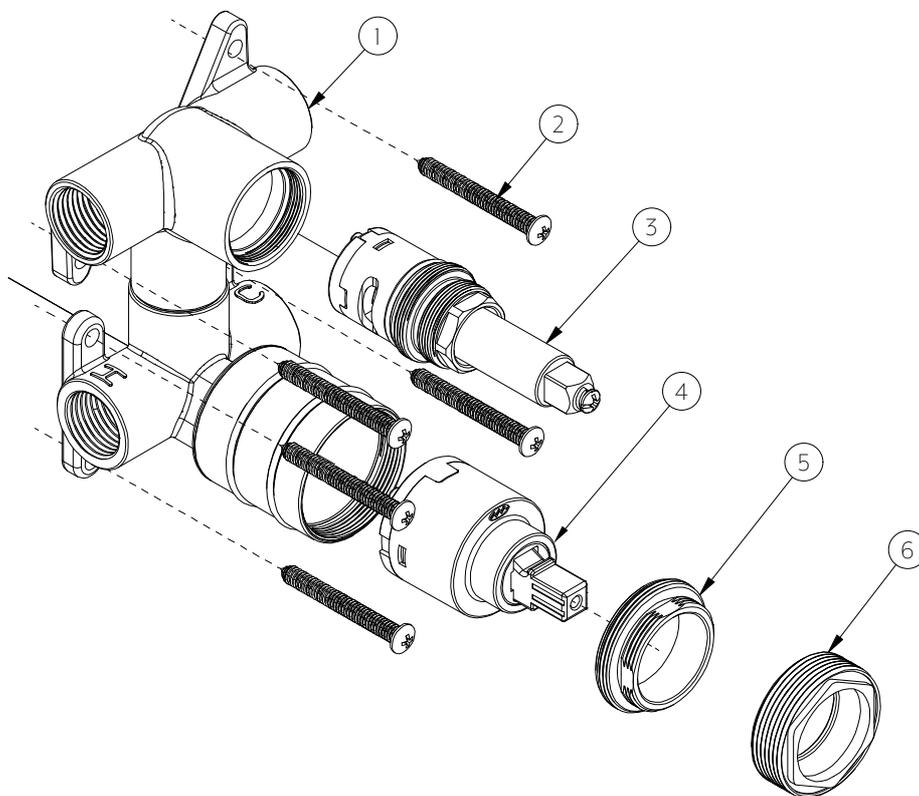

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material

# INSTALLATION GUIDE

**Note:** This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.




**NOTE:** See 'In-wall Minimal Diverter Body -SS304' installation guide for in-wall set out.



- ① Choose mixer sleeve based on how far your in-wall body protrudes from finish wall.

- ② 1. Screw on diverter sleeve and insert plastic collar.  
2. Slide on mixer sleeve and screw dome on to secure.

A - Long sleeve


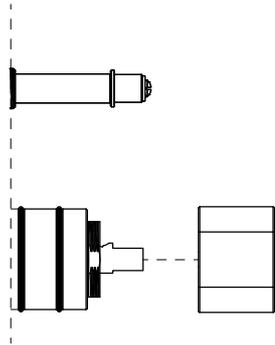


B - Short sleeve

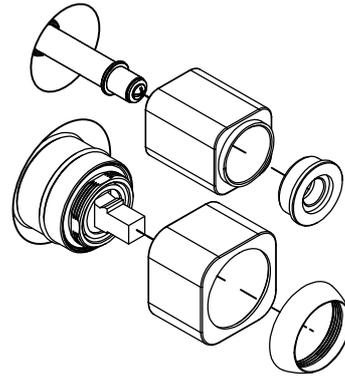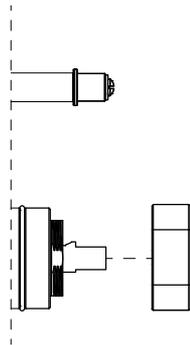

- ③ Slide backplate over both sleeves ensuring not to scratch.

- ④ Install both handles by tightening grub screws with provided Allen key and inserting grub screw covers.

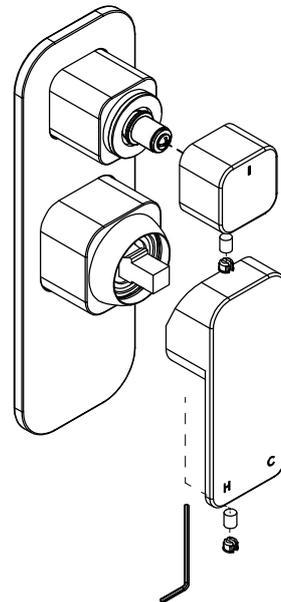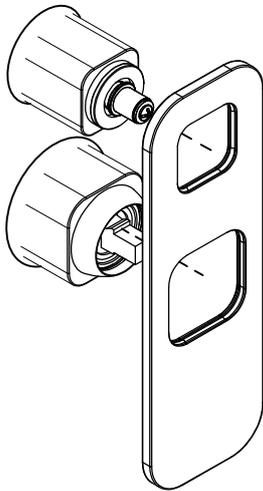

WHAT'S IN THE BOX (Diverter handle)			
1x Diverter BP		1x Diverter handle	
		1x Diverter sleeve	
1x Grub screw cover		1x Plastic collar	


WHAT'S IN THE BOX (Mixer handle)			
1x Mixer handle		1x Short sleeve	
		1x Long sleeve	
1x Grub screw cover		1x Dome	



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material