



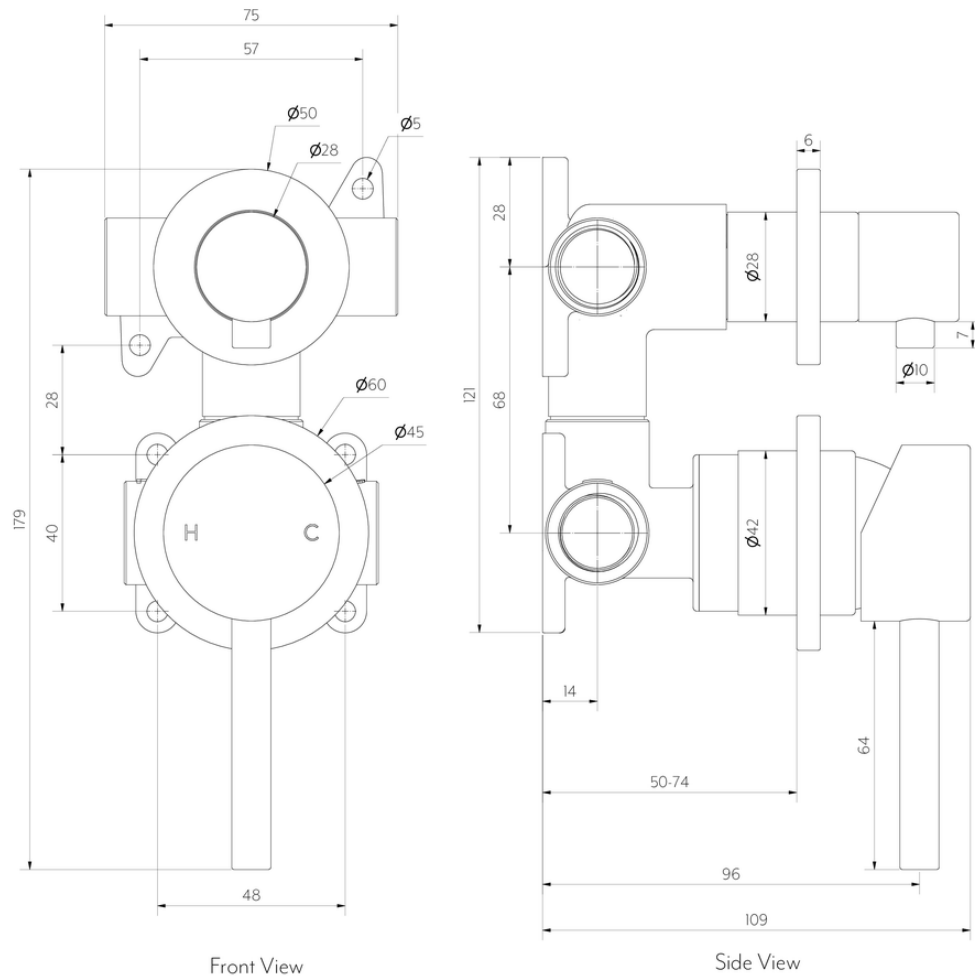

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE	Domestic / Commercial
MATERIAL	Stainless Steel 316
TEMPERATURE RATING	Maximum continuous working temperature 75°C If the water temperature exceeds 75°C,an approved tempering valve must be fitted
PRESSURE RATING	Recommended minimum working pressure 0.5 Bar Recommended maximum working pressure 5 Bar Hot and cold water inlet pressure should be equal
SUITABLE HOT WATER UNITS	Storage tank: Yes Continuous Flow: Yes Gravity Feed: Suitable
PACKAGING	Box 1 of 3 In-wall Minimal Diverter Mixer Body (Rough-In) Box 2 of 3 Sola Minimal Mixer Handle Kit (Fit-Off) Box 3 of 3 Sola Diverter Backplate, Sleeve & Knob ICP (Fit-Off)

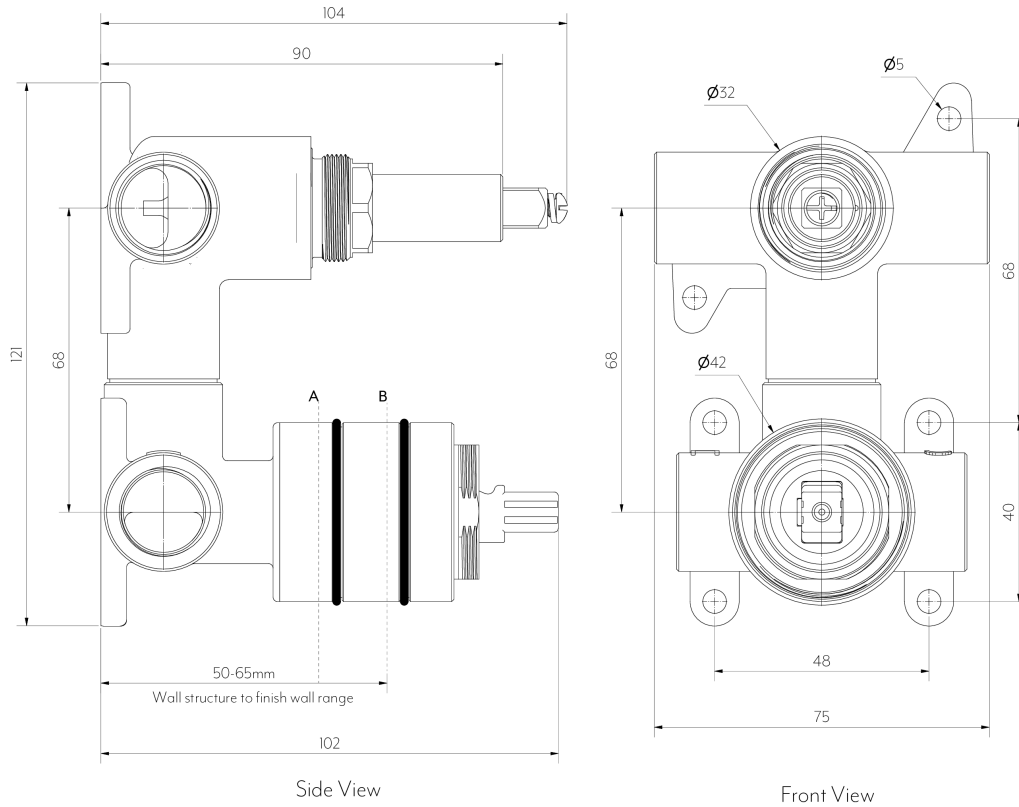

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE | WARRANTY

Domestic / Commercial | [Click here for warranty periods](#)

MATERIAL

Stainless Steel 304

TEMPERATURE RATING

Maximum continuous working temperature 75°C
If the water temperature exceeds 75°C, an approved tempering valve must be fitted

PRESSURE RATING

Recommended minimum working pressure 0.5 Bar
Recommended maximum working pressure 5 Bar
Hot and cold water inlet pressure should be equal

SUITABLE HOT WATER UNITS

Storage tank: Yes
Continuous Flow: Yes
Gravity Feed: Suitable

INSTALLATION GUIDE




Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.



ROUGH IN


See specification image for finish wall setback

- ① Screw in-wall body into wall structure with provided screws.
- ② ***NOTE:** Two locking nuts are included in packaging. Please ensure correct one is installed for the chosen range of tapware prior to connecting water supply. Connect hot, cold and both mixed lines. **TEST AND CHECK FOR LEAKS.**
- ③ Sheetting and waterproof layer can now be applied.
*Ensure cutout in finish wall is Ø50mm for the mixer handle and Ø35mm for the diverter.

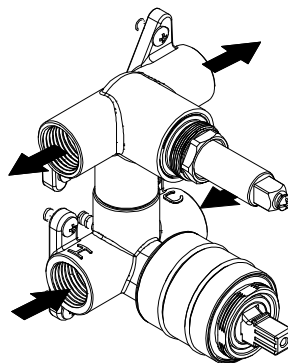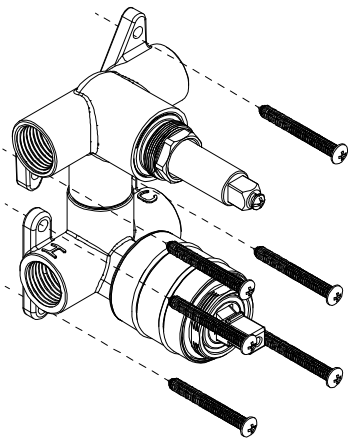

WHAT'S IN THE BOX


1. Body
2. Fixing screws (x6)
3. Diverter cartridge
4. Mixer cartridge
5. Locking nut (NESSO)
6. Locking nut (SOLA)

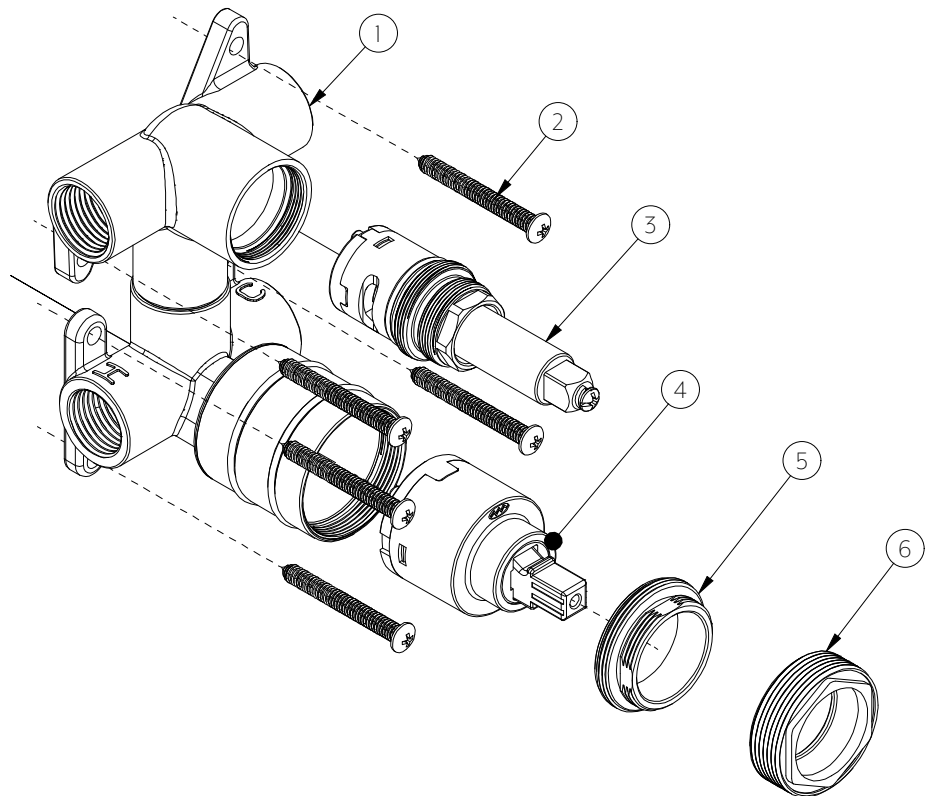


Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material

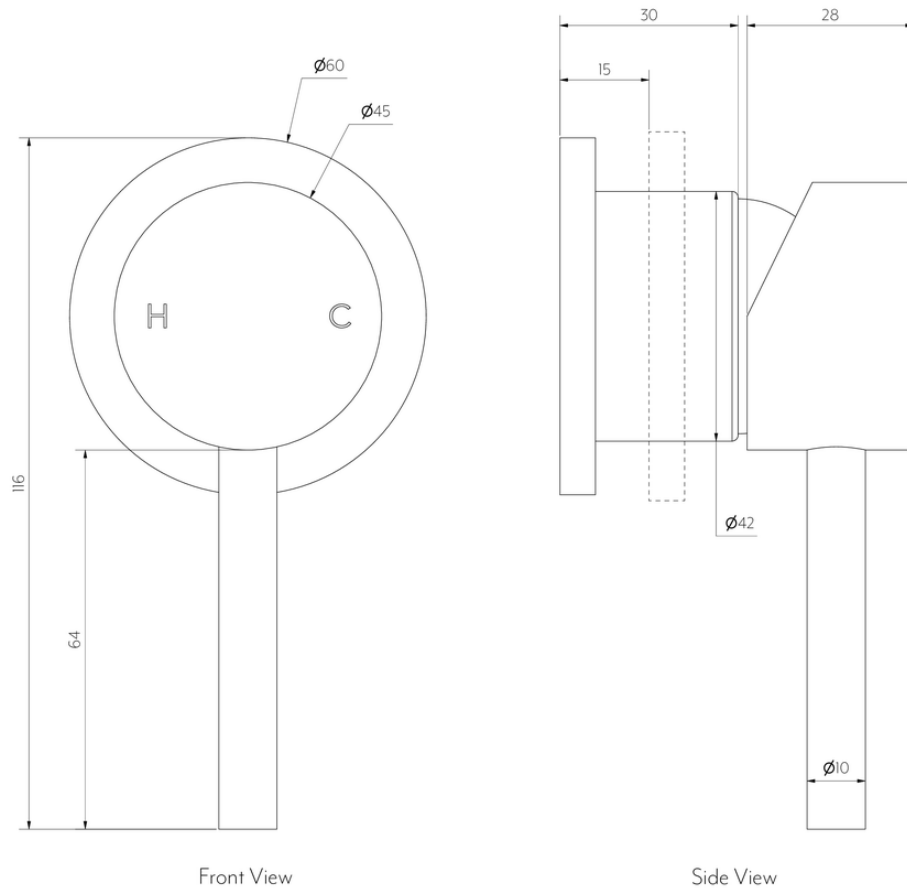

Note: Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE

Domestic

MATERIAL

316 Stainless Steel

INSTALLATION GUIDE



Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.

ABI
INTERIORS


Note: See 316 Stainless Steel In Wall Mixer Body installation guide for in-wall set out.

- 1 Choose sleeve based on how far your in-wall body protrudes from finish wall and slide on.


- 2 Slide back plate over sleeve ensuring not to scratch. Screw dome on and fit handle onto cartridge.

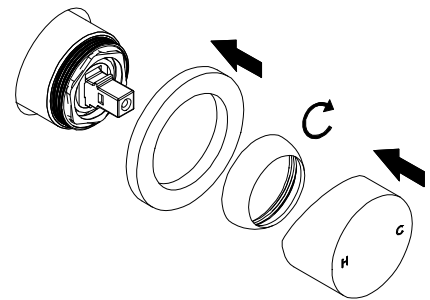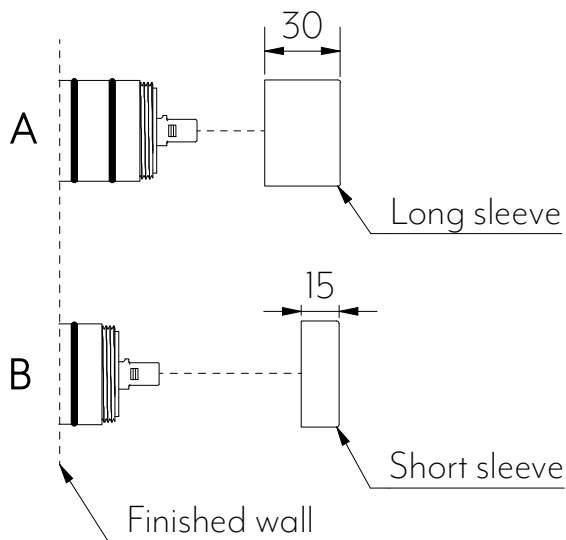


- 3 Tighten grub screw with provided Allen Key. Screw stem into handle. Test and commission.

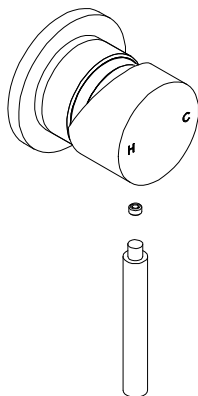

MIXER OPERATION




WHAT'S IN THE BOX

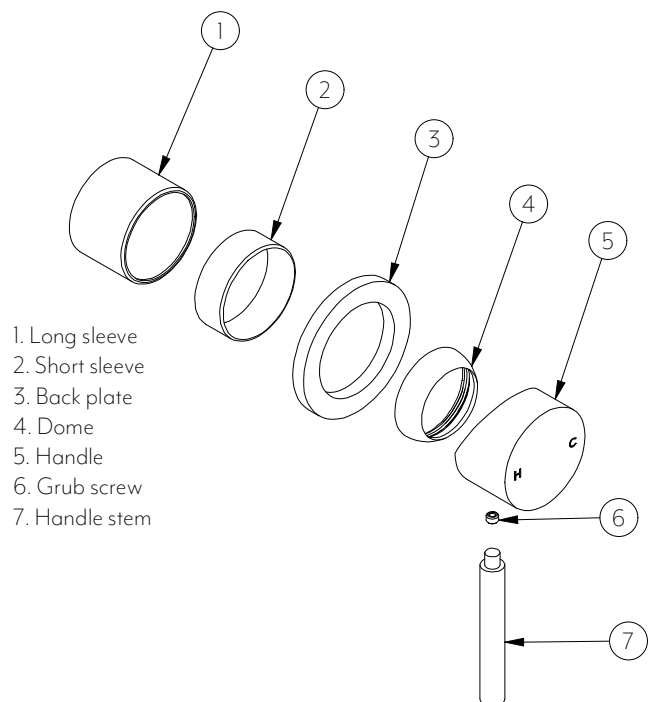

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material



INSTALLATION GUIDE

Note: This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.





Please refer to IN-WALL MINIMAL DIVERTER MIXER BODY - 304 SS install guide & SOLA - MINIMAL HANDLE KIT install guide for initial steps.

- ① Screw sleeve onto diverter nut.
- ② Insert plastic spacer into sleeve, slide diverter back plate over sleeve, then push handle onto the end of the diverter.

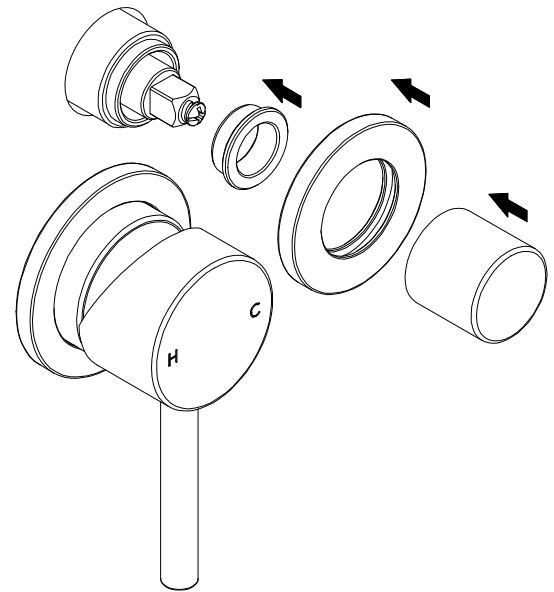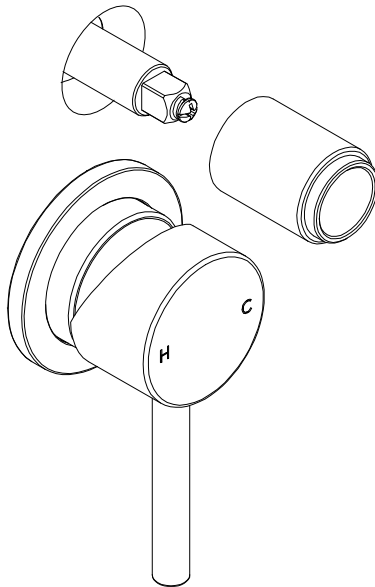

- ③ Screw grub screw into handle with provided Allen Key.
- ④ Screw diverter stick onto handle. Test and commission

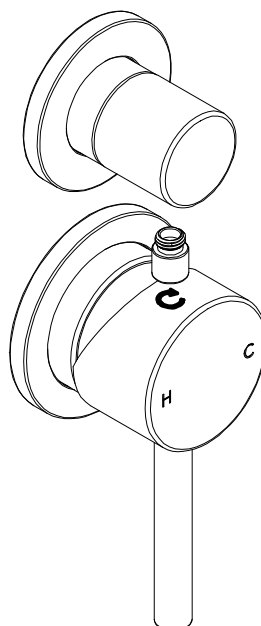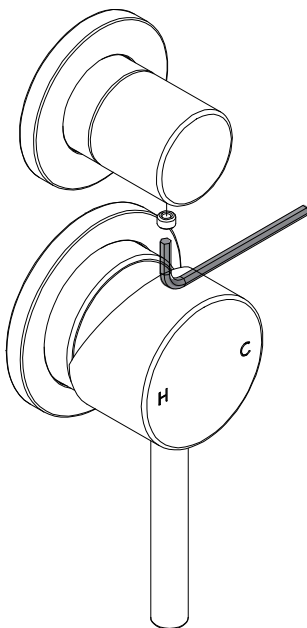


In The Box
1 x Back diverter plate
1 x Diverter sleeve
1 x Plastic spacer
1 x Diverter handle
1 x Diverter stick



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material