


# ZURI UNDERCOUNTER ROUND BASIN (OVERFLOW)

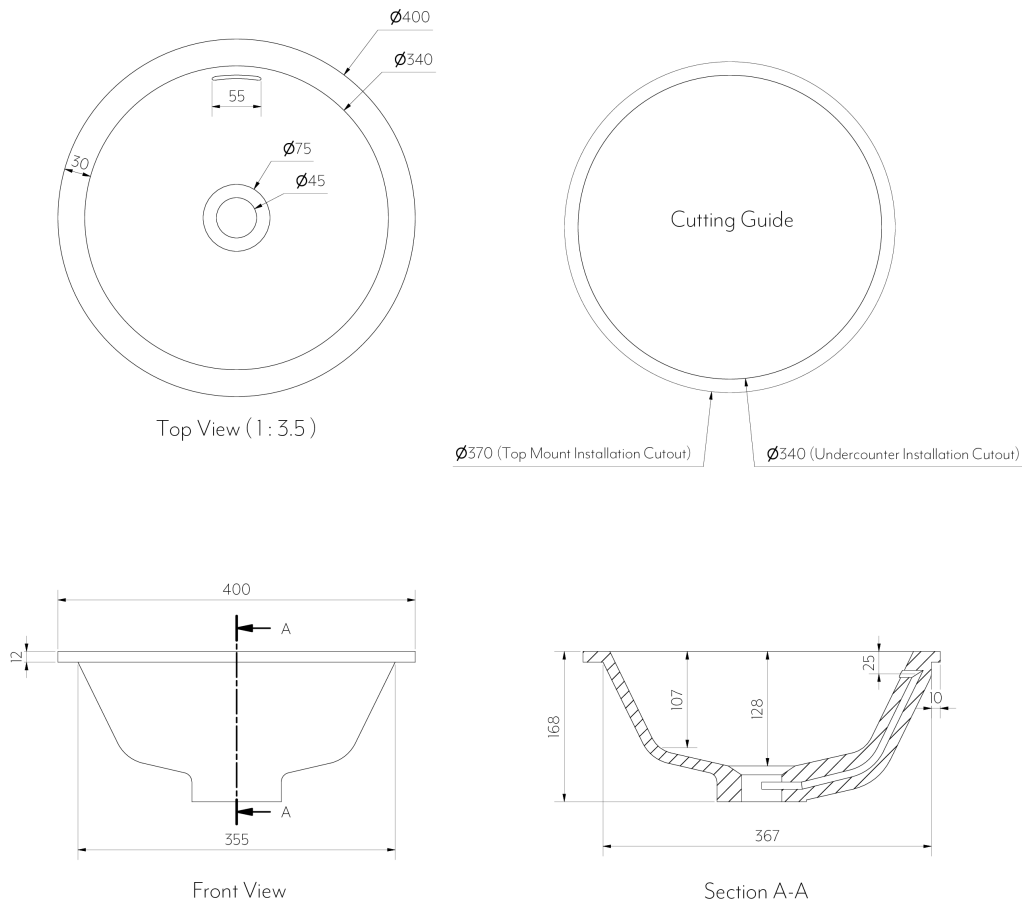

**Note:** Dimensions are nominal measurements only

## SPECIFICATIONS

### RECOMMENDED USE

Domestic

### MATERIAL

Solid Surface

### INSTALLATION

Under Mount, Top Mount

### OVERFLOW

Yes, overflow built in - no connectors required

# INSTALLATION GUIDE


**Note:** This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.



## UNDERMOUNT INSTALLATION


- 1 Mark out desired location of sink using the cut out template dimensions provided.

Cut out sink hole using preferred method.

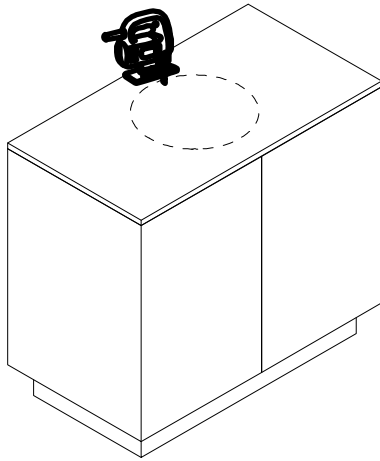

- 2 Clean around the edge of bench top sink hole & perimeter of sink rim.

Position the sink in the cabinet below the bench top hole. Apply adhesive to the perimeter of sink rim & lift into position.

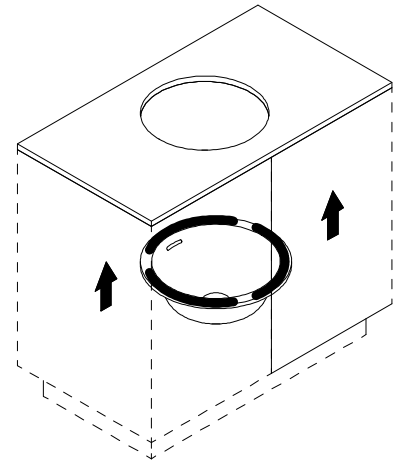


- 3 Lay a piece of timber across the bench top hole & position in line with sink hole below.

Place clamp through the sink hole & tighten the clamp to hold the sink in place.

Wipe away any excess adhesive around bench top opening.


Note: Use rags to protect surfaces when either the clamp or timber is making contact with the bench top or sink.

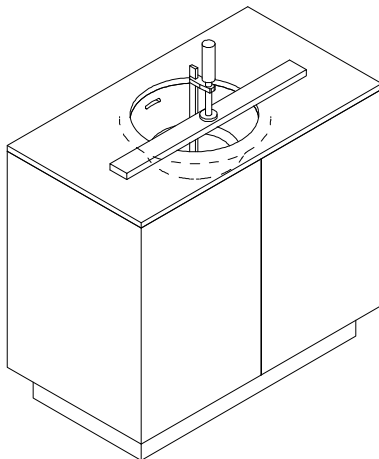

- 4 Depending on material of bench top mount brackets use either 1. adhesive, or 2. provided screws.

1. Apply adhesive to the mounting bracket & fix it to the underside of the bench top & sink rim. Repeat brackets at regular intervals. Wipe away any excess adhesive.


2. Screw mounting brackets into bench top at regular intervals. Mark and pre drill holes if required.

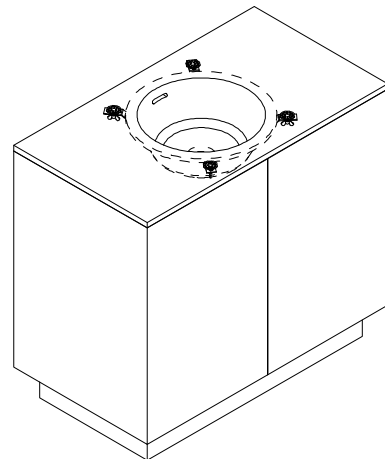

Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material

# INSTALLATION GUIDE


**Note:** This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.



## UNDERMOUNT INSTALLATION


- 1 Mark out desired location of sink using the cut out template dimensions provided.

Cut out sink hole using preferred method. Note: If cutting a stone bench top it will need to be cut in a controlled environment by a licensed trades person as per OH&S regulations.

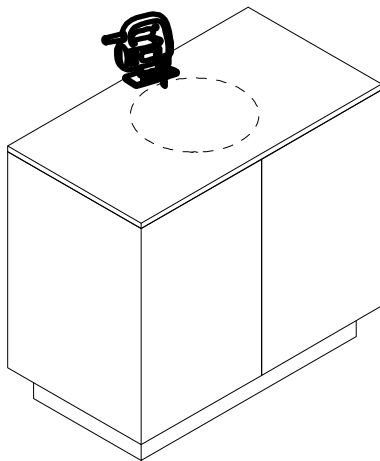


- 2 Clean around the edge of bench top sink hole & perimeter of sink rim.


Apply adhesive sealant to the underside perimeter of sink rim & lower into position.

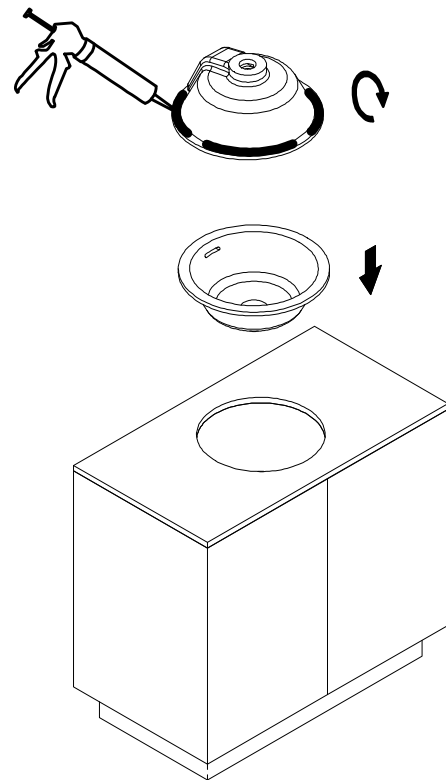

- 3 Wipe away any excess adhesive sealant around sink rim.

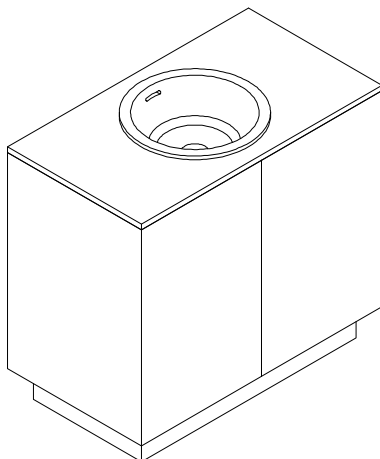

### What's in the box



1 x Basin sink




4 x Mounting brackets



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive



DO NOT use cleaning pads with abrasive surfaces as this may scratch the material