

**Note:** Dimensions are nominal measurements only

SPECIFICATIONS

RECOMMENDED USE	Domestic
MATERIAL	Solid Brass
TEMPERATURE RATING	Maximum continuous working temperature 75°C If the water temperature exceeds 75°C,an approved tempering valve must be fitted
PRESSURE RATING	Recommended minimum working pressure 0.2 Bar Recommended maximum working pressure 5 Bar Hot and cold water inlet pressure should be equal
SUITABLE HOT WATER UNITS	Storage tank: Yes Continuous Flow: Yes Gravity Feed: Suitable
WATER EFFICIENCY	Flow Rate 5.5L/min


# INSTALLATION GUIDE






**Note:** This product must be installed by a licensed plumber. This is a general installation guide - there are many factors involved that can alter the installation method. **AU/NZ:** For installations within Australia and New Zealand, this product must be installed in compliance with AS/NZS 3500. **UK:** For installations in the United Kingdom this product must be installed in compliance with the Water Supply (Water Fittings) Regulations and Water Supply (Water Fittings) (Scotland) Byelaws. **Other:** For installations outside these countries, this product must be installed in compliance with the standards in your respective country.

- ① Slide the back plate onto the spout, make sure that the rubber is firmly in place to protect the spout and stop the back plate from moving around.

- ② Apply teflon thread tape to the breech point, twist the spout on and hand tighten.

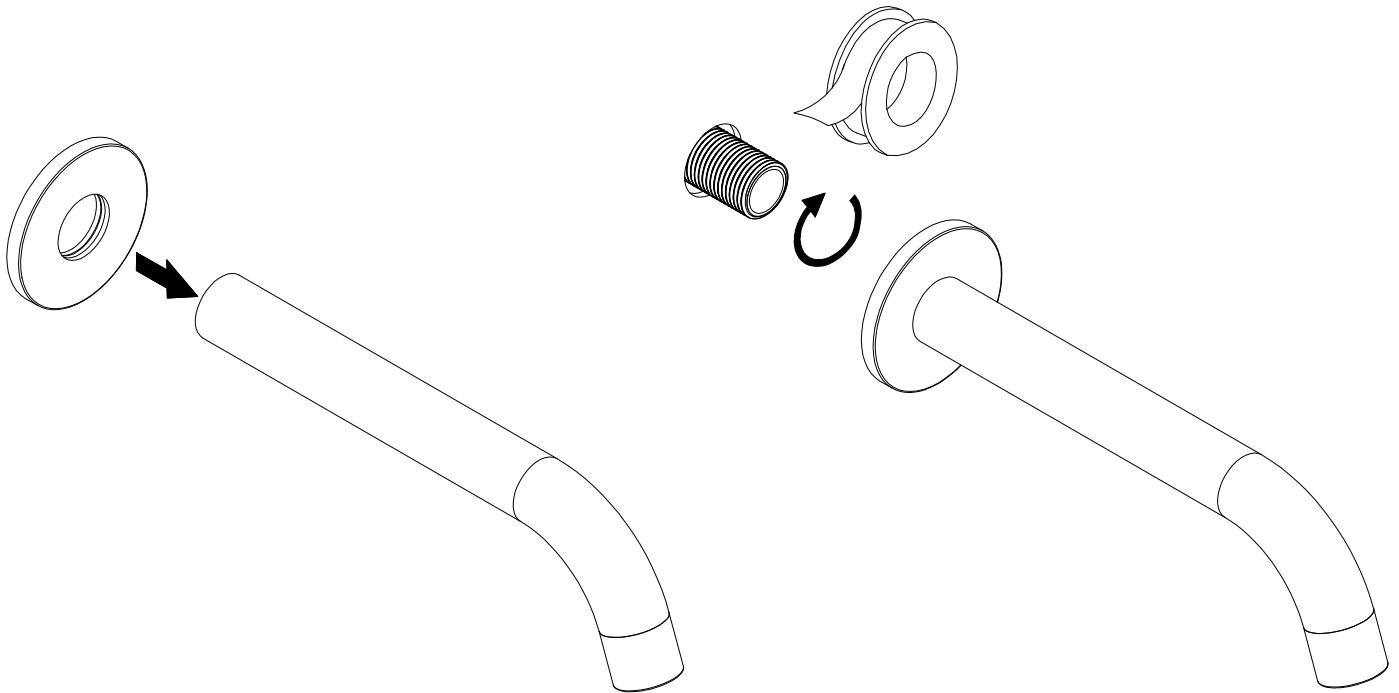


IN THE BOX		
		
1 x Back Plate	1 x Spout	1 x Adaptor



Regularly clean with mild liquid detergent or soap and water



DO NOT use cream cleaners or bleach. These substances are abrasive




DO NOT use cleaning pads with abrasive surfaces as this may scratch the material

# 1/2 INCH MALE ADAPTOR INSTALLATION GUIDE




**Note:** This product must be installed by a licensed tradesperson.  
This is a general installation guide - there are many factors that are involved that can alter the installation method.

① Apply teflon tape to 1/2 inch male adaptor.



② Fit 1/2 inch male adaptor to female BP and tighten with a 12 mm metric Allan key.

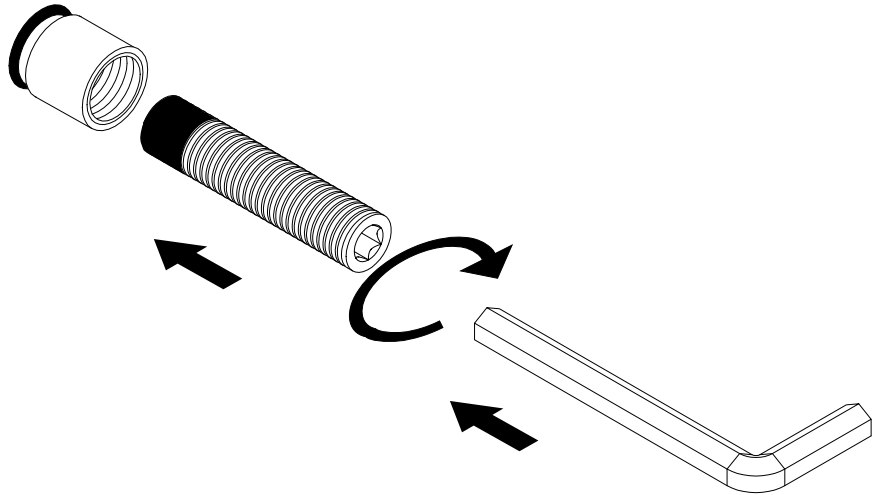

③ Cut 1/2 inch male adaptor to suit wall thickness and product.

