


VESI WALL-MOUNTED BASIN 400MM

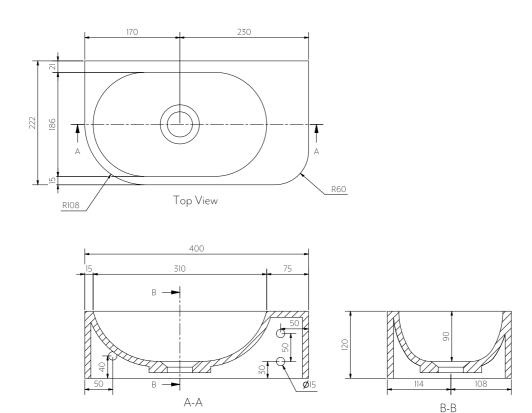

Note: Dimensions are nominal measurements only

SPECIFICATIONS	
RECOMMENDED USE	Domestic
MATERIAL	Solid Surface
INSTALLATION	Wall Mount, recommended with Wall Mount Spout/Mixer
OVERFLOW	No
CAPACITY	3L
RIM THICKNESS	15mm


INSTALLATION GUIDE

This product must be installed by a licensed plumber. This is a general installation guide - there are many factors that are involved that can alter the installation method. This product install must comply with AS/NZS 3500.




(1)

Check the desired height of basin from floor.




2) Fit wo

Fit waste and trap to basin.



(3)

Hold basin against wall aligning outlet of trap with waste pipe. Extend telescopic trap up or down to find desired height & cut waste to suit trap.




4

If correct height and position is suitable, level the top of the basin & mark out desired position.

Drill holes through the back of basin into structure within wall with a wood drill .


Fix basin into structural support in wall.



(5)

Secure plumbing to basin and wall outlet. Test by running water through the waste. Place the cover plate over drain.


Silicon top and sides of basin if necessary.



Regularly clean with mild liquid detergent or soap and water.



DO NOT use cream cleaners or bleach. These substances are abrasive.





DO NOT use cleaning pads with abrasive surfaces as this may scratch the material.

